



  
**COMBEST**

**DESIGN FOR  
YOUR DEMAND**


HIGH QUALITY • DURABLE  
**PROFESSIONAL PNEUMATIC TOOLS**



KYMYO INDUSTRIAL CO., LTD.



**COMBEST®**  
Pneumatic Tools INDEX

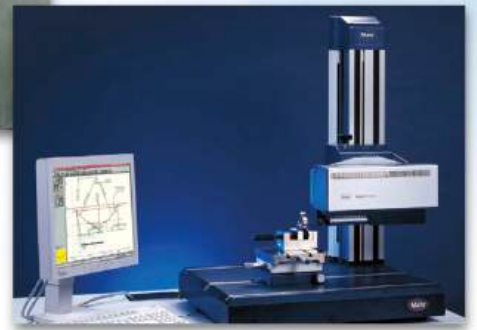

*INDUSTRIAL PERFORMANCE*



China



Taiwan



USA

# INDEX

## 2023 NEW PRODUCTS P1-7

- AIR ORBITAL SANDER (OIL FREE TYPE) — P1-3
- AIR ORBITAL SANDERS for ROBOT — P4
  - MINI AIR SANDER ----- P4
  - AIR FLOATING TYPE ----- P4
  - AIR ORBITAL SANDER for ROBOT ----- P5
- AIR PALM SANDER & POLISHER — P6
- AIR WELD-BEAD CUTTER — P7

## AIR SANDER P8-24

- RANDOM ORBITAL SANDERS — P8-12
  - ECONOMIC SERIES ----- P8
  - DELUXE SERIES ----- P8-9
  - PREMIER SERIES ----- 10
  - PLATINUM SERIES ----- P11
  - DIAMOND SERIES ----- P12
- JITTERBUG-TYPE ORBITAL SANDERS — P13-15
- HEAVY DUTY SANDERS — P16-17
  - SINGLE-HAND HEAVY DUTY RANDOM ORBITAL SANDERS ----- P16
  - TWO-HAND HEAVY DUTY RANDOM ORBITAL SANDERS ----- P16
  - TWO-HAND JITTERBUG ORBITAL SANDERS - P17
  - TWO-HAND GEAR-DRIVEN SANDERS ----- P17
- WET AIR SANDERS & ORBITAL DELTA SANDERS — P18
- FREE SANDERS/IN-LINE FINISHING SANDERS — P19
  - FREE SANDERS ----- P19
  - IN-LINE FINISHING SANDERS ----- P19
  - STRAIGHT LINE AIR SANDER ----- P19
- RIGHT ANGLE SANDERS — P20
  - ORBITAL SANDERS ----- P20
  - DISC SANDERS ----- P20

- FINGER SANDERS/AIR HIGH-SPEED CUTTER P21
  - FINGER SANDERS ----- P21
- BELT SANDERS — P22

## AIR TOOLS P23-31

- AIR POLISHERS — P23-24
- AIR FILE & SAW — P25
- AIR GRINDERS — P26-30
  - WHEEL GRINDERS ----- P26
  - MINI GRINDERS ----- P27
  - DIE GRINDERS ----- P27-28
  - MINI ANGLE DIE GRINDERS ----- P28
  - MICRO DIE GRINDERS ----- P29-30
- AIR DRILLS & SPECIALTY TOOLS — P31

## VACUUM CLEANER P32

- AUTOMATIC PROFESSIONAL VACUUM CLEANER P32
  - WET/DRY VACUUM CLEANER ----- P32

## ACCESSORIES P33-38

- SANDING PAD ----- P33-37
- FIXING TOOLS ----- P37
- DUST HOSE SET ----- P38
- DUST BAG & ADHESIVE-OFF WHEEL ----- P38

HIGH PRECISION • HIGH QUALITY • HIGH EFFICIENCY



## Air Orbital Sander

### Non-Vacuum

CY-3330N	
Pad Size	123 or 148 mm (5" or 6")
Tool Spindle Thread	5/16" - 24 Female
Orbit Diameter	5 mm (3/16")
Free Speed	12000 rpm
Exhaust Type	Rear
Air Inlet	1/4" PT
Hose I.D. Size	6.5 mm (1/4")
Air Pressure	6.3 kg/cm <sup>2</sup> (90 psi)
Avg. Air Cons.	0.3 m <sup>3</sup> /min (10.5 CFM)
Sound Level	79 dBA
Vibration	< 2.5 m/sec <sup>2</sup>
HP(W)	0.29 (218)
Pad Weight	120 g
Measurement	L168 x H88 mm
Net Weight	0.76 kgs (1.67 lbs)
Packing	10pcs/ctn/2.4cu-ft/GW:18.5kg



5 mm (3/16")

Other type: Orbit Dia.: 2.5 mm (3/32") **CY-3340N6**

Other type: Orbit Dia.: 9.5 mm (3/8") **CY-3350N6**  
(Without oil free type)

### Self-Generated Vacuum

CY-3330D	
Pad Size	123 or 148 mm (5" or 6")
Tool Spindle Thread	5/16" - 24 Female
Orbit Diameter	5 mm (3/16")
Free Speed	12000 rpm
Exhaust Type	Rear
Air Inlet	1/4" PT
Hose I.D. Size	6.5 mm (1/4")
Air Pressure	6.3 kg/cm <sup>2</sup> (90 psi)
Avg. Air Cons.	0.3 m <sup>3</sup> /min (10.5 CFM)
Sound Level	85 dBA
Vibration	< 2.5 m/sec <sup>2</sup>
HP(W)	0.29 (218)
Pad Weight	120 g
Measurement	L234 x H88 mm
Net Weight	0.83 kgs (1.83 lbs)
Packing	10pcs/ctn/3.1cu-ft/GW:20kg




Other type: Orbit Dia.: 2.5 mm (3/32") **CY-3340D6**

Other type: Orbit Dia.: 9.5 mm (3/8") **CY-3350D6**  
(Without oil free type)

### Central Vacuum

CY-3330V	
Pad Size	123 or 148 mm (5" or 6")
Tool Spindle Thread	5/16" - 24 Female
Orbit Diameter	5 mm (3/16")
Free Speed	12000 rpm
Exhaust Type	Rear
Air Inlet	1/4" PT
Hose I.D. Size	6.5 mm (1/4")
Air Pressure	6.3 kg/cm <sup>2</sup> (90 psi)
Avg. Air Cons.	0.3 m <sup>3</sup> /min (10.5 CFM)
Sound Level	80 dBA
Vibration	< 2.5 m/sec <sup>2</sup>
HP(W)	0.29 (218)
Pad Weight	120 g
Measurement	L204 x H88 mm
Net Weight	0.83 kgs (1.83 lbs)
Packing	10pcs/ctn/2.4cu-ft/GW:18.5kg



5 mm (3/16")


1" Inner Thread  
(Option)

Other type: Orbit Dia.: 2.5 mm (3/32") **CY-3340V6**

Other type: Orbit Dia.: 9.5 mm (3/8") **CY-3350V6**  
(Without oil free type)

### Central Vacuum

CY-3330VL6B	
Multi Holes Pad Size (Velcro)	148 mm (6")
Tool Spindle Thread	5/16" - 24 Female
Orbit Diameter	5 mm (3/16")
Free Speed	12000 rpm
Exhaust Type	Rear
Air Inlet	1/4" PT
Hose I.D. Size	6.5 mm (1/4")
Air Pressure	6.3 kg/cm <sup>2</sup> (90 psi)
Avg. Air Cons.	0.3 m <sup>3</sup> /min (10.5 CFM)
Sound Level	80 dBA
Vibration	< 2.5 m/sec <sup>2</sup>
HP(W)	0.29 (218)
Pad Weight	120 g
Measurement	L204 x H88 mm
Net Weight	0.83 kgs (1.83 lbs)
Packing	10pcs/ctn/2.4cu-ft/GW:18.5kg



5 mm (3/16")

1" Inner Thread  
(Option)

Other type: Orbit Dia.: 2.5 mm (3/32") **CY-3340VL6B**

Other type: Orbit Dia.: 9.5 mm (3/8") **CY-3350VL6B**  
(Without oil free type)

## Three types of cylinder sets and two kinds of dust hose set



1 Steel rotor type non-vacuum sander

2 Oil free type self-generated vacuum sander with dust hose set

3 Plastic rotor type self-generated vacuum sander (female thread type) with dust hose set

**Air Orbital Sander**

**Non-Vacuum**

CY-3330N3	
Pad Size	73 mm (3")
Tool Spindle Thread	5/16" - 24 Female
Orbit Diameter	5 mm (3/16")
Free Speed	12000 rpm
Exhaust Type	Rear
Air Inlet	1/4" PT
Hose I.D. Size	6.5 mm (1/4")
Air Pressure	6.3 kg/cm <sup>2</sup> (90 psi)
Avg. Air Cons.	0.3 m <sup>3</sup> /min (10.5 CFM)
Sound Level	79 dBA
Vibration	< 2.5 m/sec <sup>2</sup>
HP(W)	0.29 (218)
Pad Weight	80 g (Option:30 g)
Measurement	L126 x H88 mm
Net Weight	0.59 kgs (1.3 lbs)
Packing	10pcs/ctn/2.4cu-ft/GW:18.5kg



Other type: Orbit Dia.: 2.5 mm (3/32") **CY-3340N3**

**Non-Vacuum**


CY-2080NL	
Velcro face Pad Size	75 x 100 mm (3" x 4")
Orbit Diameter	3 mm (1/8")
Free Speed	10000 rpm
Exhaust Type	Rear
Air Inlet	1/4" PT
Hose I.D. Size	6.5 mm (1/4")
Air Pressure	6.3 kg/cm <sup>2</sup> (90 psi)
Avg. Air Cons.	0.3 m <sup>3</sup> /min (10.6 CFM)
Sound Level	79 dBA
Vibration	< 2.5 m/sec <sup>2</sup>
HP(W)	0.29 (217)
Measurement	L135 x H87 mm
Net Weight	0.74 kgs (1.63 lbs)
Packing	12pcs/ctn/1.58cu-ft/GW:20kg



Option : Vinyl face Pad

**Self-Generated Vacuum**

CY-3330D3	
Pad Size	73 mm (3")
Tool Spindle Thread	5/16" - 24 Female
Orbit Diameter	5 mm (3/16")
Free Speed	12000 rpm
Exhaust Type	Rear
Air Inlet	1/4" PT
Hose I.D. Size	6.5 mm (1/4")
Air Pressure	6.3 kg/cm <sup>2</sup> (90 psi)
Avg. Air Cons.	0.3 m <sup>3</sup> /min (10.5 CFM)
Sound Level	85 dBA
Vibration	< 2.5 m/sec <sup>2</sup>
HP(W)	0.29 (218)
Pad Weight	80 g (Option:30 g)
Measurement	L203 x H88 mm
Net Weight	0.65 kgs (1.43 lbs)
Packing	10pcs/ctn/3.1cu-ft/GW:20kg



Other type: Orbit Dia.: 2.5 mm (3/32") **CY-3340D3**

**Self-Generated Vacuum**

CY-2080DL	
Velcro face Pad Size	75 x 100 mm (3" x 4")
Orbit Diameter	3 mm (1/8")
Free Speed	10000 rpm
Exhaust Type	Rear
Air Inlet	1/4" PT
Hose I.D. Size	6.5 mm (1/4")
Air Pressure	6.3 kg/cm <sup>2</sup> (90 psi)
Avg. Air Cons.	0.3 m <sup>3</sup> /min (10.6 CFM)
Sound Level	83 dBA
Vibration	< 2.5 m/sec <sup>2</sup>
HP(W)	0.29 (217)
Measurement	L218 x H87 mm
Net Weight	0.79 kgs (1.74 lbs)
Packing	10pcs/ctn/2.4cu-ft/GW:18.5kg



Option : Vinyl face Pad

**Central Vacuum**


CY-3330V3	
Pad Size	73 mm (3")
Tool Spindle Thread	5/16" - 24 Female
Orbit Diameter	5 mm (3/16")
Free Speed	12000 rpm
Exhaust Type	Rear
Air Inlet	1/4" PT
Hose I.D. Size	6.5 mm (1/4")
Air Pressure	6.3 kg/cm <sup>2</sup> (90 psi)
Avg. Air Cons.	0.3 m <sup>3</sup> /min (10.5 CFM)
Sound Level	80 dBA
Vibration	< 2.5 m/sec <sup>2</sup>
HP(W)	0.29 (218)
Pad Weight	80 g (Option:30 g)
Measurement	L167 x H88 mm
Net Weight	0.65 kgs (1.43 lbs)
Packing	10pcs/ctn/2.4cu-ft/GW:18.5kg



Other type: Orbit Dia.: 2.5 mm (3/32") **CY-3340V3**

**Central Vacuum**

CY-2080VL	
Velcro face Pad Size	75 x 100 mm (3" x 4")
Orbit Diameter	3 mm (1/8")
Free Speed	10000 rpm
Exhaust Type	Rear
Air Inlet	1/4" PT
Hose I.D. Size	6.5 mm (1/4")
Air Pressure	6.3 kg/cm <sup>2</sup> (90 psi)
Avg. Air Cons.	0.3 m <sup>3</sup> /min (10.6 CFM)
Sound Level	80 dBA
Vibration	< 2.5 m/sec <sup>2</sup>
HP(W)	0.29 (217)
Measurement	L181 x H87 mm
Net Weight	0.78 kgs (1.72 lbs)
Packing	12pcs/ctn/1.58cu-ft/GW:20kg



Option : Vinyl face Pad

NEW PRODUCTS

AIR SANDERS

AIR TOOLS

VACUUM CLEANER

ACCESSORIES

## Air Orbital Sander

### Non-Vacuum

#### CY-2090NL

Velcro face Pad Size	93 x 178 mm (3-2/3" x 7")
Orbit Diameter	3 mm (1/8")
Free Speed	10000 rpm
Exhaust Type	Rear
Air Inlet	1/4" PT
Hose I.D. Size	6.5 mm (1/4")
Air Pressure	6.3 kg/cm <sup>2</sup> (90 psi)
Avg. Air Cons	0.3 m <sup>3</sup> /min (10.6 CFM)
Sound Level	79 dBA
Vibration	< 2.5 m/sec <sup>2</sup>
HP(W)	0.29 (217)
Measurement	L196 x H109 mm
Net Weight	1.09 kgs (2.4 lbs)
Packing	12pcs/ctn/1.55cu-ft/GW:20kg



3mm (1/8")

Option : Vinyl face Pad

### Non-Vacuum

#### CY-2100NL

Multi Holes Pad Size (Velcro)	70 x 196 mm (3" x 8")
Orbit Diameter	3 mm (1/8")
Free Speed	10000 rpm
Exhaust Type	Rear
Air Inlet	1/4" PT
Hose I.D. Size	6.5 mm (1/4")
Air Pressure	6.3 kg/cm <sup>2</sup> (90 psi)
Avg. Air Cons	0.3 m <sup>3</sup> /min (10.6 CFM)
Sound Level	79 dBA
Vibration	< 2.5 m/sec <sup>2</sup>
HP(W)	0.29 (217)
Measurement	L198 x H106 mm
Net Weight	0.89 kgs (1.96 lbs)
Packing	12pcs/ctn/1.55cu-ft/GW:20kg



3mm (1/8")

Option : Vinyl face Pad

### Self-Generated Vacuum

#### CY-2090DL

Velcro face Pad Size	93 x 178 mm (3-2/3" x 7")
Orbit Diameter	3 mm (1/8")
Free Speed	10000 rpm
Exhaust Type	Rear
Air Inlet	1/4" PT
Hose I.D. Size	6.5 mm (1/4")
Air Pressure	6.3 kg/cm <sup>2</sup> (90 psi)
Avg. Air Cons	0.3 m <sup>3</sup> /min (10.6 CFM)
Sound Level	83 dBA
Vibration	< 2.5 m/sec <sup>2</sup>
HP(W)	0.29 (217)
Measurement	L255 x H109 mm
Net Weight	1.12 kgs (2.47 lbs)
Packing	10pcs/ctn/2.95cu-ft/GW:20kg



Rotational



3mm (1/8")

(Standard)



1" Inner Thread

(Option)

Option : Vinyl face Pad

### Self-Generated Vacuum

#### CY-2100DL

Multi Holes Pad Size (Velcro)	70 x 198 mm (3" x 8")
Orbit Diameter	3 mm (1/8")
Free Speed	10000 rpm
Exhaust Type	Rear
Air Inlet	1/4" PT
Hose I.D. Size	6.5 mm (1/4")
Air Pressure	6.3 kg/cm <sup>2</sup> (90 psi)
Avg. Air Cons	0.3 m <sup>3</sup> /min (10.6 CFM)
Sound Level	83 dBA
Vibration	< 2.5 m/sec <sup>2</sup>
HP(W)	0.29 (217)
Measurement	L263 x H106 mm
Net Weight	0.94 kgs (2.07 lbs)
Packing	10pcs/ctn/2.95cu-ft/GW:20kg



Rotational



3mm (1/8")

(Standard)



1" Inner Thread

(Option)

Option : Vinyl face Pad


### Central Vacuum

#### CY-2090VL

Velcro face Pad Size	93 x 178 mm (3-2/3" x 7")
Orbit Diameter	3 mm (1/8")
Free Speed	10000 rpm
Exhaust Type	Rear
Air Inlet	1/4" PT
Hose I.D. Size	6.5 mm (1/4")
Air Pressure	6.3 kg/cm <sup>2</sup> (90 psi)
Avg. Air Cons	0.3 m <sup>3</sup> /min (10.6 CFM)
Sound Level	80 dBA
Vibration	< 2.5 m/sec <sup>2</sup>
HP(W)	0.29 (217)
Measurement	L226 x H109 mm
Net Weight	1.11 kgs (2.45 lbs)
Packing	12pcs/ctn/1.55cu-ft/GW:20kg



Rotational



3mm (1/8")



1" Inner Thread

(Option)

Option : Vinyl face Pad


### Central Vacuum

#### CY-2100VL

Multi Holes Pad Size (Velcro)	70 x 198 mm (3" x 8")
Orbit Diameter	3 mm (1/8")
Free Speed	10000 rpm
Exhaust Type	Rear
Air Inlet	1/4" PT
Hose I.D. Size	6.5 mm (1/4")
Air Pressure	6.3 kg/cm <sup>2</sup> (90 psi)
Avg. Air Cons	0.3 m <sup>3</sup> /min (10.6 CFM)
Sound Level	80 dBA
Vibration	< 2.5 m/sec <sup>2</sup>
HP(W)	0.29 (217)
Measurement	L237 x H106 mm
Net Weight	0.93 kgs (2.05 lbs)
Packing	12pcs/ctn/1.55cu-ft/GW:20kg



Rotational



3mm (1/8")



1" Inner Thread

(Option)

Option : Vinyl face Pad

**Air Orbital Sander for Robot**

**Dual Action Sander**

CY-7300A	
Pad Size	3" (2" Option)
Net Weight	0.61 kgs (1.34 lbs)
Avg. Air Cons.	0.4 m <sup>3</sup> /min (14.1 CFM)
Spindle Thread	M6
Hose I.D. Size	5 mm (3/16")
Free Speed	15000 rpm
Exhaust Type	Rear
Air Pressure	6.3 kg/cm <sup>2</sup> (90 psi)
Orbit Diameter	3 mm (3/32")
Vibration	< 2.5 m/sec <sup>2</sup>
Sound Level	79 dBA
HP(W)	0.2 (150)
Pad Weight	30 g
Measurement	L91 x H95 mm
Packing	12pcs/ctn/0.8cu-ft/GW:13kg



3 mm (3/32")



2" Pad  
(Option)

Other type: Orbit Dia.: 1.5 mm (3/64") **CY-7310A**

**Polisher Sander**

CY-7400A	
Pad Size	3" (2" Option)
Net Weight	0.71 kgs (1.56 lbs)
Avg. Air Cons.	0.4 m <sup>3</sup> /min (14.1 CFM)
Spindle Thread	5/16" - 24 Female
Hose I.D. Size	5 mm (3/16")
Free Speed	2500 rpm
Exhaust Type	Rear
Air Pressure	6.3 kg/cm <sup>2</sup> (90 psi)
Vibration	0.8 m/s <sup>2</sup>
Sound Level	79 dBA
HP(W)	0.2 (150)
Pad Weight	30 g
Measurement	L91 x H115 mm
Packing	12pcs/ctn/0.8cu-ft/GW:13kg



2" Pad Wool  
(Option)

**Roloc Pad Sander**

CY-7500A	
Pad Size	3" (2" Option)
Net Weight	0.61 kgs (1.34 lbs)
Avg. Air Cons.	0.4 m <sup>3</sup> /min (14.1 CFM)
Spindle Thread	1/4" - 20 Male
Hose I.D. Size	5 mm (3/16")
Free Speed	15000 rpm
Exhaust Type	Rear
Air Pressure	6.3 kg/cm <sup>2</sup> (90 psi)
Vibration	0.9 m/s <sup>2</sup>
Sound Level	79 dBA
HP(W)	0.2 (150)
Measurement	L92 x H110 mm
Packing	12pcs/ctn/0.8cu-ft/GW:13kg



2" Pad Fiber Disc  
(Option)

**Floating Type**

CY-7310	
Pad Size	3" (2" Option)
Tool Spindle Thread	M6 Female
Orbit Diameter	3 mm (3/32")
Free Speed	15000 rpm
Range	0-5 mm
Floating Pressure	38-45 N (Option : 48-54 N and 60-70 N)
Hose O.D. Size	8 mm (5/16")
Hose I.D. Size	5 mm (3/16")
Air Pressure	6.3 kg/cm <sup>2</sup> (90 psi)
Avg. Air Cons.	0.4 m <sup>3</sup> /min (14.1 CFM)
Sound Level	73 dBA
Vibration	< 2.5 m/sec <sup>2</sup>
HP(W)	0.2 (150)
Pad Weight	30 g
Measurement	L100 x W100 x H165 mm
Net Weight	1.67 kgs (3.67 lbs)
Packing	6 pcs/ctn/0.8 u-ft/GW:11kg



3 mm (3/32")

Other type: Polishing Type **CY-7311**

Other type: Disc Sander Type **CY-7312**

TAIWAN PATENT  
No.: D202409

## ORBITAL SANDERS for ROBOT



Evolution, High Quality

**Air Orbital Sander for Robot**
**Dual Action Sander**
**CY-7700A**

Pad Size	123 or 148 mm (5" or 6")
Spindle Thread	5/16" - 24 Female
Orbit Diameter	5 mm (3/16")
Free Speed	12000 rpm
Exhaust Type	Rear
Hose I.D. Size	6.5 mm (1/4")
Air Pressure	6.3 kg/cm <sup>2</sup> (90 psi)
Avg. Air Cons.	0.3 m <sup>3</sup> /min (10.6 CFM)
Vibration	< 2.5 m/sec <sup>2</sup>
Measurement	L150 x H88 mm
Net Weight	1.05 kgs (2.31 lbs)
Packing	6pcs/ctn/1.44cu-ft/GW:11.5kg


 TAIWAN PATENT  
No.: D202410

**Dual Action Sander**
**CY-7700B**

Pad Size	123 or 148 mm (5" or 6")
Spindle Thread	5/16" - 24 Female
Orbit Diameter	5 mm (3/16")
Free Speed	12000 rpm
Exhaust Type	Rear
Hose I.D. Size	6.5 mm (1/4")
Air Pressure	6.3 kg/cm <sup>2</sup> (90 psi)
Avg. Air Cons.	0.3 m <sup>3</sup> /min (10.6 CFM)
Vibration	< 2.5m/sec <sup>2</sup>
Measurement	L191 x H88 mm
Net Weight	1.12 kgs (2.47 lbs)
Packing	6pcs/ctn/1.44cu-ft/GW:11.5kg


**Orbital Sander**
**CY-7800A**

Pad Size	93 x 176 mm (3-1/2" x 7")
Orbit Diameter	2.5 mm (3/32")
Free Speed	9000 rpm
Exhaust Type	Rear
Hose I.D. Size	6.5 mm (1/4")
Air Pressure	6.3 kg/cm <sup>2</sup> (90 psi)
Avg. Air Cons.	0.3 m <sup>3</sup> /min (10.6 CFM)
Vibration	< 2.5 m/sec <sup>2</sup>
Measurement	L176 x H104 mm
Net Weight	1.26 kgs (2.77 lbs)
Packing	6pcs/ctn/1.44cu-ft/GW:11.5kg


 TAIWAN PATENT  
No.: D202411

**Central Vacuum**
**CY-7800B**

Pad Size	93 x 176 mm (3-1/2" x 7")
Orbit Diameter	2.5 mm (3/32")
Free Speed	9000 rpm
Exhaust Type	Rear
Hose I.D. Size	6.5 mm (1/4")
Air Pressure	6.3 kg/cm <sup>2</sup> (90 psi)
Avg. Air Cons.	0.3 m <sup>3</sup> /min (10.6 CFM)
Vibration	< 2.5m/sec <sup>2</sup>
Measurement	L217 x H104 mm
Net Weight	1.33 kgs (2.93 lbs)
Packing	6pcs/ctn/1.44cu-ft/GW:11.5kg



**Orbital Sander**
**CY-7801A**

Pad Size	73 x 98 mm (3" x 4")
Spindle Thread	M5 x P0.8
Orbit Diameter	3 mm (3/32")
Free Speed	9000 rpm
Exhaust Type	Rear
Hose I.D. Size	6.5 mm (1/4")
Air Pressure	6.3 kg/cm <sup>2</sup> (90 psi)
Avg. Air Cons.	0.26 m <sup>3</sup> /min (9.2 CFM)
Vibration	< 2.5 m/sec <sup>2</sup>
Measurement	L105 x H76 mm
Net Weight	0.84 kgs (1.85 lbs)
Packing	6pcs/ctn/1.44cu-ft/GW:11.5kg


**Delta Sander**
**CY-7801B3**

Pad Size	90 x 130 mm
Spindle Thread	M5 x P0.8
Orbit Diameter	3 mm (3/32")
Free Speed	9000 rpm
Exhaust Type	Rear
Hose I.D. Size	6.5 mm (1/4")
Air Pressure	6.3 kg/cm <sup>2</sup> (90 psi)
Avg. Air Cons.	0.26 m <sup>3</sup> /min (9.2 CFM)
Vibration	< 2.5 m/sec <sup>2</sup>
Measurement	L147 x H74 mm
Net Weight	0.81 kgs (1.78 lbs)
Packing	6pcs/ctn/1.44cu-ft/GW:11.5kg


 Other type: W70 x L100 mm **CY-7801B2**
**ORBITAL SANDERS for ROBOT**

 (For CY-77 and CY-78 series)  
The area of slash could be drilled and tapped






## Palm Sander

### Industry Palm Orbital Sander

CY-3500A	
Pad Size	2" or 3"
Spindle Thread	5/16" - 24 Female
Orbit Diameter	3 mm (3/32")
Free Speed	16000 rpm
Exhaust Type	Swivel Side
Air Inlet	1/4" PT
Air Pressure	6.3 kg/cm <sup>2</sup> (90 psi)
Avg. Air Cons.	22 CFM
Measurement	L85 x H118 mm
Net Weight	0.6 kgs (1.32 lbs)
Packing	10pcs/ctn/0.7cu-ft/GW:7kg



### Industry Palm Polisher

CY-3503A	
Pad Size	2" or 3"
Spindle Thread	5/16" - 24 Female
Free Speed	2600 rpm
Exhaust Type	Swivel Side
Air Inlet	1/4" PT
Air Pressure	6.3 kg/cm <sup>2</sup> (90 psi)
Avg. Air Cons.	22 CFM
Measurement	L77 x H117 mm
Net Weight	0.71 kgs (1.56 lbs)
Packing	20pcs/ctn/0.7cu-ft/GW:8kg



### Industry Palm Sander

CY-3501A	
Pad Size	2" or 3"
Spindle Thread	5/16" - 24 Female
Free Speed	19000 rpm
Exhaust Type	Swivel Side
Air Inlet	1/4" PT
Air Pressure	6.3 kg/cm <sup>2</sup> (90 psi)
Avg. Air Cons.	22 CFM
Measurement	L85 x H96 mm
Net Weight	0.45 kgs (0.99 lbs)
Packing	20pcs/ctn/0.9cu-ft/GW:11kg



### Palm Nib Sander

CY-3504A	
Pad Size	30 mm
Spindle Thread	M10 Female
Orbit Diameter	3 mm (3/32")
Free Speed	5000 rpm
Exhaust Type	Front
Air Inlet	1/4" PT
Horse Power	0.1 HP
Air Pressure	6.3 kg/cm <sup>2</sup> (90 psi)
Avg. Air Cons.	22 CFM
Measurement	L72 x H125 mm
Net Weight	0.55 kgs (1.21 lbs)
Packing	10pcs/ctn/0.7cu-ft/GW:7kg



### Industry Palm Stripping Sander

CY-3502A	
Pad Size	2" or 3"
Spindle Thread	1/4" - 20 Male
Free Speed	19000 rpm
Exhaust Type	Swivel Side
Air Inlet	1/4" PT
Air Pressure	6.3 kg/cm <sup>2</sup> (90 psi)
Avg. Air Cons.	22 CFM
Measurement	L79 x H104 mm
Net Weight	0.46 kgs (1.01 lbs)
Packing	20pcs/ctn/0.9cu-ft/GW:11kg



### Palm Belt Sander

CY-3505A	
Belt Size	10 x 330 mm
Horse Power	0.35 HP
Free Speed	20000 rpm
Exhaust Type	Front
Air Inlet	1/4" PT
Air Pressure	6.3 kg/cm <sup>2</sup> (90 psi)
Avg. Air Cons.	22 CFM
Measurement	L220 x H93 mm
Net Weight	0.64 kgs (1.41 lbs)
Packing	10pcs/ctn/0.7cu-ft/GW:9kg



PNEUMATIC TOOLS...Quality, Efficiency, Service

**COMBEST**

NEW PRODUCTS

AIR SANDERS

AIR TOOLS

VACUUM CLEANER

ACCESSORIES

**Weld-bead Cutter**
**Weld-Bead Cutter**

CY-7200A	
Roller Cutter	Ø27 x 20 mm
Free Speed	10,000 rpm
Tool Spindle Size	Ø12.7
Exhaust Type	Rear
Air Inlet	1/4" PT
Hose I.D. Size	10 mm (3/8")
Air Pressure	6.3 kg/cm <sup>2</sup> (90 psi)
Avg. Air Cons.	0.5 m <sup>3</sup> /min
Sound Level	89 dBA
Vibration	0.9 m/sec <sup>2</sup>
HP(W)	0.25 (187)
Measurement	L230 x H145 mm
Net Weight	1.25 kgs
Packing	8 pcs/ctn/1.6cu-ft/GW:14.5kg

**UTILITY & EFFICIENCY**

**OPTION-Accessories**


Removing scratches from stainless steel, metal etc...



Removing burrs for precise work.



Mirror finishing. Buffing compound.


**Classification of Tungsten Steel Cutting Tool Materials**

Classification	Explanation
P1	Low-Carbon Steels<10°HRC... Short Chipping
P2	Medium and High-Carbon Steels <25°HRC
P3	Alloy Steels and Tool Steels<35°HRC
P4	Alloy Steels and Tool Steels 35°~48°HRC
P5	Ferritic 、Martensitic 、 and PH Stainless Steels<35°HRC
P6	High-Strength Ferritic 、 Martensitic 、 and PH Stainless 35°~48°HRC
M	Stainless Steels
K	Cast Iron
N1	Wrought Aluminum
N2	Low-Silicon Aluminum Alloys 、 Si<13%
N3	High-Silicon Aluminum Alloys 、 Si >13%
N4	Copper and Copper Alloys
N5	Plastics
S	Nickel Alloys and Titanium
H	Hardened Steels
Remarks	1. The tungsten steel cutting wheel material used in CY7200 is classified as P1, suitable for cutting low carbon steel (hardness <10°HRC), iron, aluminum, or other soft metals, as well as acrylic. 2. The cutting angle of the tool during its fabrication varies depending on the material being cut.

## Economic Series

### Non-Vacuum

CY-301N	
Pad Size	123 or 148 mm (5" or 6")
Tool Spindle Thread	5/16" - 24 Female
Orbit Diameter	5 mm (3/16")
Free Speed	10000 rpm
Exhaust Type	Rear
Air Inlet	1/4" PT
Hose I.D. Size	6.5 mm (1/4")
Air Pressure	6.3 kg/cm <sup>2</sup> (90 psi)
Avg. Air Cons.	0.34 m <sup>3</sup> /min (11.9 CFM)
Sound Level	80 dBA
Vibration	< 2.5 m/sec <sup>2</sup>
HP(W)	0.32 (240)
Pad Weight	5" : 100 g 6" : 110 g
Measurement	5" : L146 x H104 mm
Net Weight	1.2 kgs (2.64 lbs)
Packing	5" : 12pcs/ctn/2.2cu-ft/GW:20.5kg 6" : 12pcs/ctn/2.3cu-ft/GW:22.5kg



### Self-Generated Vacuum

CY-301D	
Pad Size	123 or 148 mm (5" or 6")
Tool Spindle Thread	5/16" - 24 Female
Orbit Diameter	5 mm (3/16")
Free Speed	10000 rpm
Exhaust Type	Rear
Air Inlet	1/4" PT
Hose I.D. Size	6.5 mm (1/4")
Air Pressure	6.3 kg/cm <sup>2</sup> (90 psi)
Avg. Air Cons.	0.34 m <sup>3</sup> /min (11.9 CFM)
Sound Level	83 dBA
Vibration	< 2.5 m/sec <sup>2</sup>
HP(W)	0.32 (240)
Pad Weight	5" : 100 g 6" : 110 g
Measurement	5" : L146 x H104 mm
Net Weight	1.2 kgs (2.64 lbs)
Packing	5" : 12pcs/ctn/2.2cu-ft/GW:20.5kg 6" : 12pcs/ctn/2.3cu-ft/GW:22.5kg



### Non-Vacuum

CY-311N	
Pad Size	123 or 148 mm (5" or 6")
Tool Spindle Thread	5/16" - 24 Female
Orbit Diameter	5 mm (3/16")
Free Speed	10000 rpm
Exhaust Type	Rear
Air Inlet	1/4" PT
Hose I.D. Size	6.5 mm (1/4")
Air Pressure	6.3 kg/cm <sup>2</sup> (90 psi)
Avg. Air Cons.	0.34 m <sup>3</sup> /min (11.9 CFM)
Sound Level	80 dBA
Vibration	< 2.5 m/sec <sup>2</sup>
HP(W)	0.32 (240)
Pad Weight	5" : 100 g 6" : 110 g
Measurement	5" : L146 x H102 mm
Net Weight	1.2 kgs (2.64 lbs)
Packing	5" : 12pcs/ctn/2.2cu-ft/GW:20.5kg 6" : 12pcs/ctn/2.3cu-ft/GW:22.5kg



### Self-Generated Vacuum

CY-311D	
Pad Size	123 or 148 mm (5" or 6")
Tool Spindle Thread	5/16" - 24 Female
Orbit Diameter	5 mm (3/16")
Free Speed	10000 rpm
Exhaust Type	Rear
Air Inlet	1/4" PT
Hose I.D. Size	6.5 mm (1/4")
Air Pressure	6.3 kg/cm <sup>2</sup> (90 psi)
Avg. Air Cons.	0.34 m <sup>3</sup> /min (11.9 CFM)
Sound Level	83 dBA
Vibration	< 2.5 m/sec <sup>2</sup>
HP(W)	0.32 (240)
Pad Weight	5" : 100 g 6" : 110 g
Measurement	5" : L156 x H102 mm
Net Weight	1.2 kgs (2.64 lbs)
Packing	5" : 12pcs/ctn/2.2cu-ft/GW:20.5kg 6" : 12pcs/ctn/2.3cu-ft/GW:22.5kg



## Deluxe Series

### Non-Vacuum

CY-313N	
Pad Size	123 or 148 mm (5" or 6")
Tool Spindle Thread	5/16" - 24 Female
Orbit Diameter	5 mm (3/16")
Free Speed	10000 rpm
Exhaust Type	Rear
Air Inlet	1/4" PT
Hose I.D. Size	6.5 mm (1/4")
Air Pressure	6.3 kg/cm <sup>2</sup> (90 psi)
Avg. Air Cons.	0.34 m <sup>3</sup> /min (11.9 CFM)
Sound Level	81 dBA
Vibration	< 2.5 m/sec <sup>2</sup>
HP(W)	0.32 (240)
Pad Weight	5" : 100 g 6" : 120 g
Measurement	5" : L160 x H94 mm
Net Weight	0.9 kgs (1.98 lbs)
Packing	5" : 12pcs/ctn/2.2cu-ft/GW:20.5kg 6" : 12pcs/ctn/2.3cu-ft/GW:22.5kg



### Self-Generated Vacuum

CY-313D	
Pad Size	123 or 148 mm (5" or 6")
Tool Spindle Thread	5/16" - 24 Female
Orbit Diameter	5 mm (3/16")
Free Speed	10000 rpm
Exhaust Type	Rear
Air Inlet	1/4" PT
Hose I.D. Size	6.5 mm (1/4")
Air Pressure	6.3 kg/cm <sup>2</sup> (90 psi)
Avg. Air Cons.	0.34 m <sup>3</sup> /min (11.9 CFM)
Sound Level	84 dBA
Vibration	< 2.5 m/sec <sup>2</sup>
HP(W)	0.32 (240)
Pad Weight	5" : 100 g 6" : 120 g
Measurement	5" : L160 x H94 mm
Net Weight	0.9 kgs (1.98 lbs)
Packing	5" : 12pcs/ctn/2.2cu-ft/GW:20.5kg 6" : 12pcs/ctn/2.3cu-ft/GW:22.5kg



## Deluxe Series

### Non-Vacuum

CY-303N	
Pad Size	123 or 148 mm (5" or 6")
Tool Spindle Thread	5/16" - 24 Female
Orbit Diameter	5 mm (3/16")
Free Speed	10000 rpm
Exhaust Type	Rear
Air Inlet	1/4" PT
Hose I.D. Size	6.5 mm (1/4")
Air Pressure	6.3 kg/cm <sup>2</sup> (90 psi)
Avg. Air Cons.	0.34 m <sup>3</sup> /min (11.9 CFM)
Sound Level	81 dBA
Vibration	< 2.5 m/sec <sup>2</sup>
HP(W)	0.32 (240)
Pad Weight	5" : 100 g 6" : 120 g
Measurement	5" : L162 x H94 mm
Net Weight	0.9 kgs (1.98 lbs)
Packing	5" : 12pcs/ctn/2.2cu-ft/GW:20.5kg 6" : 12pcs/ctn/2.3cu-ft/GW:22.5kg



### Non-Vacuum

CY-3032N	
Pad Size	123 or 148 mm (5" or 6")
Tool Spindle Thread	5/16" - 24 Female
Orbit Diameter	5 mm (3/16")
Free Speed	10000 rpm
Exhaust Type	Rear
Air Inlet	1/4" PT
Hose I.D. Size	6.5 mm (1/4")
Air Pressure	6.3 kg/cm <sup>2</sup> (90 psi)
Avg. Air Cons.	0.34 m <sup>3</sup> /min (11.9 CFM)
Sound Level	81 dBA
Vibration	< 2.5 m/sec <sup>2</sup>
HP(W)	0.32 (240)
Pad Weight	5" : 100 g 6" : 120 g
Measurement	5" : L161 x H92 mm
Net Weight	0.9 kgs (1.98 lbs)
Packing	5" : 12pcs/ctn/2.2cu-ft/GW:20.5kg 6" : 12pcs/ctn/2.3cu-ft/GW:22.5kg




### Self-Generated Vacuum

CY-303D	
Pad Size	123 or 148 mm (5" or 6")
Tool Spindle Thread	5/16" - 24 Female
Orbit Diameter	5 mm (3/16")
Free Speed	10000 rpm
Exhaust Type	Rear
Air Inlet	1/4" PT
Hose I.D. Size	6.5 mm (1/4")
Air Pressure	6.3 kg/cm <sup>2</sup> (90 psi)
Avg. Air Cons.	0.34 m <sup>3</sup> /min (11.9 CFM)
Sound Level	84 dBA
Vibration	< 2.5 m/sec <sup>2</sup>
HP(W)	0.32 (240)
Pad Weight	5" : 100 g 6" : 120 g
Measurement	5" : L162 x H94 mm
Net Weight	0.9 kgs (1.98 lbs)
Packing	5" : 12pcs/ctn/2.2cu-ft/GW:20.5kg 6" : 12pcs/ctn/2.3cu-ft/GW:22.5kg




### Self-Generated Vacuum

CY-3032D	
Pad Size	123 or 148 mm (5" or 6")
Tool Spindle Thread	5/16" - 24 Female
Orbit Diameter	5 mm (3/16")
Free Speed	10000 rpm
Exhaust Type	Rear
Air Inlet	1/4" PT
Hose I.D. Size	6.5 mm (1/4")
Air Pressure	6.3 kg/cm <sup>2</sup> (90 psi)
Avg. Air Cons.	0.34 m <sup>3</sup> /min (11.9 CFM)
Sound Level	84 dBA
Vibration	< 2.5 m/sec <sup>2</sup>
HP(W)	0.32 (240)
Pad Weight	5" : 100 g 6" : 120 g
Measurement	5" : L161 x H92 mm
Net Weight	0.9 kgs (1.98 lbs)
Packing	5" : 12pcs/ctn/2.2cu-ft/GW:20.5kg 6" : 12pcs/ctn/2.3cu-ft/GW:22.5kg




### Central Vacuum

CY-303V	
Pad Size	123 or 148 mm (5" or 6")
Tool Spindle Thread	5/16" - 24 Female
Orbit Diameter	5 mm (3/16")
Free Speed	10000 rpm
Exhaust Type	Rear
Air Inlet	1/4" PT
Hose I.D. Size	6.5 mm (1/4")
Air Pressure	6.3 kg/cm <sup>2</sup> (90 psi)
Avg. Air Cons.	0.34 m <sup>3</sup> /min (11.9 CFM)
Sound Level	82 dBA
Vibration	< 2.5 m/sec <sup>2</sup>
HP(W)	0.32 (240)
Pad Weight	5" : 100 g 6" : 120 g
Measurement	5" : L193 x H94 mm
Net Weight	0.9 kgs (1.98 lbs)
Packing	5" : 12pcs/ctn/2.2cu-ft/GW:20.5kg 6" : 12pcs/ctn/2.3cu-ft/GW:22.5kg



### Central Vacuum


CY-3032V	
Pad Size	123 or 148 mm (5" or 6")
Tool Spindle Thread	5/16" - 24 Female
Orbit Diameter	5 mm (3/16")
Free Speed	10000 rpm
Exhaust Type	Rear
Air Inlet	1/4" PT
Hose I.D. Size	6.5 mm (1/4")
Air Pressure	6.3 kg/cm <sup>2</sup> (90 psi)
Avg. Air Cons.	0.34 m <sup>3</sup> /min (11.9 CFM)
Sound Level	82 dBA
Vibration	< 2.5 m/sec <sup>2</sup>
HP(W)	0.32 (240)
Pad Weight	5" : 100 g 6" : 120 g
Measurement	5" : L192 x H92 mm
Net Weight	0.9 kgs (1.98 lbs)
Packing	5" : 12pcs/ctn/2.2cu-ft/GW:20.5kg 6" : 12pcs/ctn/2.3cu-ft/GW:22.5kg



## Premier Series

### Non-Vacuum

CY-305N	
Pad Size	123 or 148 mm (5" or 6")
Tool Spindle Thread	5/16" - 24 Female
Orbit Diameter	5 mm (3/16")
Free Speed	10000 rpm
Exhaust Type	Rear
Air Inlet	1/4" PT
Hose I.D. Size	6.5 mm (1/4")
Air Pressure	6.3 kg/cm <sup>2</sup> (90 psi)
Avg. Air Cons.	0.3 m <sup>3</sup> /min (10.5 CFM)
Sound Level	80 dBA
Vibration	< 2.5 m/sec <sup>2</sup>
HP(W)	0.29 (218)
Pad Weight	5" : 100 g 6" : 120 g
Measurement	5" : L157 x H88 mm
Net Weight	1.02 kgs (2.25 lbs)
Packing	10pcs/ctn/2.4cu-ft/GW:18.5kg



### Non-Vacuum

CY-306N	
Pad Size	123 or 148 mm (5" or 6")
Tool Spindle Thread	5/16" - 24 Female
Orbit Diameter	5 mm (3/16")
Free Speed	10000 rpm
Exhaust Type	Rear
Air Inlet	1/4" PT
Hose I.D. Size	6.5 mm (1/4")
Air Pressure	6.3 kg/cm <sup>2</sup> (90 psi)
Avg. Air Cons.	0.3 m <sup>3</sup> /min (10.5 CFM)
Sound Level	80 dBA
Vibration	< 2.5 m/sec <sup>2</sup>
HP(W)	0.29 (218)
Pad Weight	5" : 100 g 6" : 120 g
Measurement	5" : L151 x H87 mm
Net Weight	0.92 kgs (2.02 lbs)
Packing	10pcs/ctn/2.4cu-ft/GW:18.5kg



### Self-Generated Vacuum

CY-305D	
Pad Size	123 or 148 mm (5" or 6")
Tool Spindle Thread	5/16" - 24 Female
Orbit Diameter	5 mm (3/16")
Free Speed	10000 rpm
Exhaust Type	Rear
Air Inlet	1/4" PT
Hose I.D. Size	6.5 mm (1/4")
Air Pressure	6.3 kg/cm <sup>2</sup> (90 psi)
Avg. Air Cons.	0.3 m <sup>3</sup> /min (10.5 CFM)
Sound Level	83 dBA
Vibration	< 2.5 m/sec <sup>2</sup>
HP(W)	0.29 (218)
Pad Weight	5" : 100 g 6" : 120 g
Measurement	5" : L232 x H88 mm
Net Weight	1.06 kgs (2.34 lbs)
Packing	10pcs/ctn/3.1cu-ft/GW:20kg




### Self-Generated Vacuum

CY-306D	
Pad Size	123 or 148 mm (5" or 6")
Tool Spindle Thread	5/16" - 24 Female
Orbit Diameter	5 mm (3/16")
Free Speed	10000 rpm
Exhaust Type	Rear
Air Inlet	1/4" PT
Hose I.D. Size	6.5 mm (1/4")
Air Pressure	6.3 kg/cm <sup>2</sup> (90 psi)
Avg. Air Cons.	0.3 m <sup>3</sup> /min (10.5 CFM)
Sound Level	83 dBA
Vibration	< 2.5 m/sec <sup>2</sup>
HP(W)	0.29 (218)
Pad Weight	5" : 100 g 6" : 120 g
Measurement	5" : L228 x H87 mm
Net Weight	0.96 kgs (2.11 lbs)
Packing	10pcs/ctn/3.1cu-ft/GW:20kg




### Central Vacuum

CY-305V	
Pad Size	123 or 148 mm (5" or 6")
Tool Spindle Thread	5/16" - 24 Female
Orbit Diameter	5 mm (3/16")
Free Speed	10000 rpm
Exhaust Type	Rear
Air Inlet	1/4" PT
Hose I.D. Size	6.5 mm (1/4")
Air Pressure	6.3 kg/cm <sup>2</sup> (90 psi)
Avg. Air Cons.	0.3 m <sup>3</sup> /min (10.5 CFM)
Sound Level	81 dBA
Vibration	< 2.5 m/sec <sup>2</sup>
HP(W)	0.29 (218)
Pad Weight	5" : 100 g 6" : 120 g
Measurement	5" : L193 x H88 mm
Net Weight	1.05 kgs (2.31 lbs)
Packing	10pcs/ctn/2.4cu-ft/GW:18.5kg



### Central Vacuum

CY-306V	
Pad Size	123 or 148 mm (5" or 6")
Tool Spindle Thread	5/16" - 24 Female
Orbit Diameter	5 mm (3/16")
Free Speed	10000 rpm
Exhaust Type	Rear
Air Inlet	1/4" PT
Hose I.D. Size	6.5 mm (1/4")
Air Pressure	6.3 kg/cm <sup>2</sup> (90 psi)
Avg. Air Cons.	0.3 m <sup>3</sup> /min (10.5 CFM)
Sound Level	81 dBA
Vibration	< 2.5 m/sec <sup>2</sup>
HP(W)	0.29 (218)
Pad Weight	5" : 100 g 6" : 120 g
Measurement	5" : L193 x H87 mm
Net Weight	0.92 kgs (2.02 lbs)
Packing	10pcs/ctn/2.4cu-ft/GW:18.5kg



NEW PRODUCTS

AIR SANDERS

AIR TOOLS

VACUUM CLEANER

ACCESSORIES

## Platinum Series

### Non-Vacuum

CY-325N6	
Pad Size	123 or 148 mm (5" or 6")
Tool Spindle Thread	5/16"-24 Female
Orbit Diameter	5 mm (3/16")
Free Speed	11000 rpm
Exhaust Type	Rear
Air Inlet	1/4" PT
Hose I.D. Size	6.5 mm (1/4")
Air Pressure	6.3 kg/cm <sup>2</sup> (90 psi)
Avg. Air Cons.	0.3 m <sup>3</sup> /min (10.5 CFM)
Sound Level	80 dBA
Vibration	< 2.5 m/sec <sup>2</sup>
HP(W)	0.29 (218)
Pad Weight	100 g (5") or 120 g (6")
Measurement	L166 x H88 mm
Net Weight	0.93 kgs (2.05 lbs)
Packing	10pcs/ctn/2.4cu-ft/GW:18.5kg



Other type: Orbit Dia.: 2.5 mm (3/32") **CY-326N6**

Other type: Orbit Dia.: 10 mm (3/8") **CY-3143N6**

### Non-Vacuum

CY-325NL3	
Pad Size	73 mm (3")
Tool Spindle Thread	5/16"-24 Female
Orbit Diameter	5 mm (3/16")
Free Speed	12000 rpm
Exhaust Type	Rear
Air Inlet	1/4" PT
Hose I.D. Size	6.5 mm (1/4")
Air Pressure	6.3 kg/cm <sup>2</sup> (90 psi)
Avg. Air Cons.	0.3 m <sup>3</sup> /min (10.5 CFM)
Sound Level	80 dBA
Vibration	< 2.5 m/sec <sup>2</sup>
HP(W)	0.29 (218)
Pad Weight	80 g
Measurement	L132 x H91 mm
Net Weight	0.86 kgs (1.89 lbs)
Packing	10pcs/ctn/2.4cu-ft/GW:18.5kg



Option : Vinyl face Pad

Other type: Orbit Dia.: 2.5 mm (3/32") **CY-326NL3**

### Self-Generated Vacuum

CY-325D6	
Pad Size	123 or 148 mm (5" or 6")
Tool Spindle Thread	5/16" - 24 Female
Orbit Diameter	5 mm (3/16")
Free Speed	11000 rpm
Exhaust Type	Rear
Air Inlet	1/4" PT
Hose I.D. Size	6.5 mm (1/4")
Air Pressure	6.3 kg/cm <sup>2</sup> (90 psi)
Avg. Air Cons.	0.3 m <sup>3</sup> /min (10.5 CFM)
Sound Level	83 dBA
Vibration	< 2.5 m/sec <sup>2</sup>
HP(W)	0.29 (218)
Pad Weight	100 g (5") or 120 g (6")
Measurement	L240 x H88 mm
Net Weight	0.98 kgs (2.16 lbs)
Packing	10pcs/ctn/3.1cu-ft/GW:20kg




Other type: Orbit Dia.: 2.5 mm (3/32") **CY-326D6**

Other type: Orbit Dia.: 10 mm (3/8") **CY-3143D6**

### Self-Generated Vacuum

CY-325DL3	
Pad Size	73 mm (3")
Tool Spindle Thread	5/16"-24 Female
Orbit Diameter	5 mm (3/16")
Free Speed	12000 rpm
Exhaust Type	Rear
Air Inlet	1/4" PT
Hose I.D. Size	6.5 mm (1/4")
Air Pressure	6.3 kg/cm <sup>2</sup> (90 psi)
Avg. Air Cons.	0.3 m <sup>3</sup> /min (10.5 CFM)
Sound Level	83 dBA
Vibration	< 2.5 m/sec <sup>2</sup>
HP(W)	0.29 (218)
Pad Weight	80 g
Measurement	L215 x H91 mm
Net Weight	0.92 kgs (2.02 lbs)
Packing	10pcs/ctn/3.1cu-ft/GW:20kg




Option : Vinyl face Pad

Other type: Orbit Dia.: 2.5 mm (3/32") **CY-326DL3**

### Central Vacuum

CY-325V6	
Pad Size	123 or 148 mm (5" or 6")
Tool Spindle Thread	5/16" - 24 Female
Orbit Diameter	5 mm (3/16")
Free Speed	11000 rpm
Exhaust Type	Rear
Air Inlet	1/4" PT
Hose I.D. Size	6.5 mm (1/4")
Air Pressure	6.3 kg/cm <sup>2</sup> (90 psi)
Avg. Air Cons.	0.3 m <sup>3</sup> /min (10.5 CFM)
Sound Level	81 dBA
Vibration	< 2.5 m/sec <sup>2</sup>
HP(W)	0.29 (218)
Pad Weight	100 g (5") or 120 g (6")
Measurement	L204 x H88 mm
Net Weight	0.97 kgs (2.13 lbs)
Packing	10pcs/ctn/2.4cu-ft/GW:18.5kg



Other type: Orbit Dia.: 2.5 mm (3/32") **CY-326V6**

Other type: Orbit Dia.: 10 mm (3/8") **CY-3143V6**

### Central Vacuum

CY-325VL3	
Pad Size	73 mm (3")
Tool Spindle Thread	5/16"-24 Female
Orbit Diameter	5 mm (3/16")
Free Speed	12000 rpm
Exhaust Type	Rear
Air Inlet	1/4" PT
Hose I.D. Size	6.5 mm (1/4")
Air Pressure	6.3 kg/cm <sup>2</sup> (90 psi)
Avg. Air Cons.	0.3 m <sup>3</sup> /min (10.5 CFM)
Sound Level	81 dBA
Vibration	< 2.5 m/sec <sup>2</sup>
HP(W)	0.29 (218)
Pad Weight	80 g
Measurement	L180 x H91 mm
Net Weight	0.96 kgs (2.11 lbs)
Packing	10pcs/ctn/2.4cu-ft/GW:18.5kg



Option : Vinyl face Pad

Other type: Orbit Dia.: 2.5 mm (3/32") **CY-326VL3**

## Diamond Series

### Non-Vacuum

CY-309N6	
Pad Size	123 or 148 mm ( 5" or 6")
Tool Spindle Thread	5/16" - 24 Female
Orbit Diameter	5 mm (3/16")
Free Speed	11000 rpm
Exhaust Type	Rear
Air Inlet	1/4" PT
Hose I.D. Size	6.5 mm (1/4")
Air Pressure	6.3 kg/cm <sup>2</sup> (90 psi)
Avg. Air Cons.	0.3 m <sup>3</sup> /min (10.5 CFM)
Sound Level	79 dBA
Vibration	< 2.5 m/sec <sup>2</sup>
HP(W)	0.29 (218)
Pad Weight	100 g (5") or 120 g (6")
Measurement	L165 x H87 mm
Net Weight	0.75 kgs (1.65 lbs)
Packing	10pcs/ctn/2.4cu-ft/GW:18.5kg



Other type: Orbit Dia.: 2.5 mm (3/32") **CY-310N6**

Other type: Orbit Dia.: 10 mm (3/8") **CY-3140N6**

### Non-Vacuum

CY-309NL3	
Pad Size	73 mm (3")
Tool Spindle Thread	5/16" - 24 Female
Orbit Diameter	5 mm (3/16")
Free Speed	12000 rpm
Exhaust Type	Rear
Air Inlet	1/4" PT
Hose I.D. Size	6.5 mm (1/4")
Air Pressure	6.3 kg/cm <sup>2</sup> (90 psi)
Avg. Air Cons.	0.3 m <sup>3</sup> /min (10.5 CFM)
Sound Level	79 dBA
Vibration	< 2.5 m/sec <sup>2</sup>
HP(W)	0.29 (218)
Pad Weight	80 g
Measurement	L133 x H91 mm
Net Weight	0.69 kgs (1.47 lbs)
Packing	10pcs/ctn/2.4cu-ft/GW:18.5kg




Option : Vinyl face Pad

Other type: Orbit Dia.: 2.5 mm (3/32") **CY-310NL3**

### Self-Generated Vacuum

CY-309D6	
Pad Size	123 or 148 mm ( 5" or 6")
Tool Spindle Thread	5/16" - 24 Female
Orbit Diameter	5 mm (3/16")
Free Speed	11000 rpm
Exhaust Type	Rear
Air Inlet	1/4" PT
Hose I.D. Size	6.5 mm (1/4")
Air Pressure	6.3 kg/cm <sup>2</sup> (90 psi)
Avg. Air Cons.	0.3 m <sup>3</sup> /min (10.5 CFM)
Sound Level	85 dBA
Vibration	< 2.5 m/sec <sup>2</sup>
HP(W)	0.29 (218)
Pad Weight	100 g (5") or 120 g (6")
Measurement	L240 x H87 mm
Net Weight	0.8 kgs (1.76 lbs)
Packing	10pcs/ctn/3.1cu-ft/GW:20kg



Other type: Orbit Dia.: 2.5 mm (3/32") **CY-310D6**

Other type: Orbit Dia.: 10 mm (3/8") **CY-3140D6**

### Self-Generated Vacuum

CY-309DL3	
Pad Size	73 mm (3")
Tool Spindle Thread	5/16" - 24 Female
Orbit Diameter	5 mm (3/16")
Free Speed	12000 rpm
Exhaust Type	Rear
Air Inlet	1/4" PT
Hose I.D. Size	6.5 mm (1/4")
Air Pressure	6.3 kg/cm <sup>2</sup> (90 psi)
Avg. Air Cons.	0.3 m <sup>3</sup> /min (10.5 CFM)
Sound Level	85 dBA
Vibration	< 2.5 m/sec <sup>2</sup>
HP(W)	0.29 (218)
Pad Weight	80 g
Measurement	L210 x H91 mm
Net Weight	0.72 kgs (1.58 lbs)
Packing	10pcs/ctn/3.1cu-ft/GW:20kg



Option : Vinyl face Pad

Other type: Orbit Dia.: 2.5 mm (3/32") **CY-310DL3**

### Central Vacuum

CY-309V6	
Pad Size	123 or 148 mm ( 5" or 6")
Tool Spindle Thread	5/16" - 24 Female
Orbit Diameter	5 mm (3/16")
Free Speed	11000 rpm
Exhaust Type	Rear
Air Inlet	1/4" PT
Hose I.D. Size	6.5 mm (1/4")
Air Pressure	6.3 kg/cm <sup>2</sup> (90 psi)
Avg. Air Cons.	0.3 m <sup>3</sup> /min (10.5 CFM)
Sound Level	80 dBA
Vibration	< 2.5 m/sec <sup>2</sup>
HP(W)	0.29 (218)
Pad Weight	100 g (5") or 120 g (6")
Measurement	L206 x H87 mm
Net Weight	0.79 kgs (1.74 lbs)
Packing	10pcs/ctn/2.4cu-ft/GW:18.5kg




Other type: Orbit Dia.: 2.5 mm (3/32") **CY-310V6**

Other type: Orbit Dia.: 10 mm (3/8") **CY-3140V6**

### Central Vacuum

CY-309VL3	
Pad Size	73 mm (3")
Tool Spindle Thread	5/16" - 24 Female
Orbit Diameter	5 mm (3/16")
Free Speed	12000 rpm
Exhaust Type	Rear
Air Inlet	1/4" PT
Hose I.D. Size	6.5 mm (1/4")
Air Pressure	6.3 kg/cm <sup>2</sup> (90 psi)
Avg. Air Cons.	0.3 m <sup>3</sup> /min (10.5 CFM)
Sound Level	80 dBA
Vibration	< 2.5 m/sec <sup>2</sup>
HP(W)	0.29 (218)
Pad Weight	80 g
Measurement	L181 x H91 mm
Net Weight	0.71 kgs (1.56 lbs)
Packing	10pcs/ctn/2.4cu-ft/GW:18.5kg



Option : Vinyl face Pad

Other type: Orbit Dia.: 2.5 mm (3/32") **CY-310VL3**

## Non-Vacuum

CY-302N	
Pad Size	74 x 145 mm (3" x 6")
Orbit Diameter	5 mm (3/16")
Free Speed	8000 rpm
Exhaust Type	Rear
Air Inlet	1/4" PT
Hose I.D. Size	6.5 mm (1/4")
Air Pressure	6.3 kg/cm <sup>2</sup> (90 psi)
Avg. Air Cons.	0.34 m <sup>3</sup> /min (11.9 CFM)
Sound Level	82 dBA
Vibration	< 2.5 m/sec <sup>2</sup>
HP(W)	0.32 (240)
Measurement	L158 x H94 mm
Net Weight	1.2 kgs (2.64 lbs)
Packing	12pcs/ctn/2.2cu-ft/GW:20.5kg



5mm (3/16")

## Self-Generated Vacuum


CY-302D	
Pad Size	74 x 145 mm (3" x 6")
Orbit Diameter	5 mm (3/16")
Free Speed	8000 rpm
Exhaust Type	Rear
Air Inlet	1/4" PT
Hose I.D. Size	6.5 mm (1/4")
Air Pressure	6.3 kg/cm <sup>2</sup> (90 psi)
Avg. Air Cons.	0.34 m <sup>3</sup> /min (11.9 CFM)
Sound Level	85 dBA
Vibration	< 2.5 m/sec <sup>2</sup>
HP(W)	0.32 (240)
Measurement	L166 x H94 mm
Net Weight	1.2 kgs (2.64 lbs)
Packing	12pcs/ctn/2.2cu-ft/GW:20.5kg



5mm (3/16")

## Non-Vacuum

CY-312N	
Pad Size	74 x 145 mm (3" x 6")
Orbit Diameter	5 mm (3/16")
Free Speed	8000 rpm
Exhaust Type	Rear
Air Inlet	1/4" PT
Hose I.D. Size	8.5 mm (1/4")
Air Pressure	6.3 kg/cm <sup>2</sup> (90 psi)
Avg. Air Cons.	0.34 m <sup>3</sup> /min (11.9 CFM)
Sound Level	82 dBA
Vibration	< 2.5 m/sec <sup>2</sup>
HP(W)	0.32 (240)
Measurement	L159 x H92 mm
Net Weight	1.2 kgs (2.64 lbs)
Packing	12pcs/ctn/2.2cu-ft/GW:20.5kg



5mm (3/16")

## Self-Generated Vacuum


CY-312D	
Pad Size	74 x 145 mm (3" x 6")
Orbit Diameter	5 mm (3/16")
Free Speed	8000 rpm
Exhaust Type	Rear
Air Inlet	1/4" PT
Hose I.D. Size	6.5 mm (1/4")
Air Pressure	6.3 kg/cm <sup>2</sup> (90 psi)
Avg. Air Cons.	0.34 m <sup>3</sup> /min (11.9 CFM)
Sound Level	85 dBA
Vibration	< 2.5 m/sec <sup>2</sup>
HP(W)	0.32 (240)
Measurement	L168 x H92 mm
Net Weight	1.2 kgs (2.64 lbs)
Packing	12pcs/ctn/2.2cu-ft/GW:20.5kg



5mm (3/16")

## Non-Vacuum

CY-3813NM34	
Vinyl face Pad Size	70 x 92 mm (3" x 4")
Orbit Diameter	3 mm (3/32")
Free Speed	9000 rpm
Exhaust Type	Rear
Air Inlet	PF 1/4" Male
Hose I.D. Size	6.5 mm (1/4")
Air Pressure	6.3 kg/cm <sup>2</sup> (90psi)
Avg. Air Cons.	0.26 m <sup>3</sup> /min (9.2 CFM)
Sound Level	81 dBA
Vibration	< 2.5 m/sec <sup>2</sup>
HP(W)	0.25 (187)
Measurement	L145 x H75 mm
Net Weight	0.76 kgs (1.67 lbs)
Packing	12pcs/ctn/1.58cu-ft/GW:18kg



3mm (3/32")

Option : Velcro face Pad

Other type: Orbit Dia.: 1.5 mm (1/16") **CY-38131N**

## Non-Vacuum

CY-3813ZM54	
Vinyl face Pad Size	108 x 96 mm (4 - 3/8" x 4")
Orbit Diameter	3 mm (3/32")
Free Speed	9000 rpm
Exhaust Type	Rear
Air Inlet	PF 1/4" Male
Hose I.D. Size	6.5 mm (1/4")
Air Pressure	6.3 kg/cm <sup>2</sup> (90psi)
Avg. Air Cons.	0.26 m <sup>3</sup> /min (9.2 CFM)
Sound Level	81 dBA
Vibration	< 2.5 m/sec <sup>2</sup>
HP(W)	0.25 (187)
Measurement	L145 x H75 mm
Net Weight	0.67 kgs (1.47 lbs)
Packing	12pcs/ctn/1.58cu-ft/GW:18kg




3mm (3/32")

Option : Velcro face Pad

Other type: Orbit Dia.: 1.5 mm (1/16") **CY-38131Z**

## Non-Vacuum

CY-3401NM	
Vinyl face Pad Size	109 x 97 mm (4-3/8" x 4")
Orbit Diameter	3 mm (3/32")
Free Speed	8000 rpm
Exhaust Type	Rear
Air Inlet	1/4" PT
Hose I.D. Size	6.5 mm (1/4")
Air Pressure	6.3 kg/cm <sup>2</sup> (90psi)
Avg. Air Cons.	0.39 m <sup>3</sup> /min (13.7 CFM)
Sound Level	81 dBA
Vibration	< 2.5 m/sec <sup>2</sup>
HP(W)	0.29 (218)
Measurement	L140 x H83 mm
Net Weight	1 kgs (2.2 lbs)
Packing	12pcs/ctn/1.58cu-ft/GW:18kg



3mm (3/32")

Option : Velcro face Pad

High Quality,  
High Efficiency,  
Improve Service





## Non-Vacuum

CY-372NL	
Velcro face Pad Size	123 mm (5")
Tool Spindle Thread	M5 x P0.8
Orbit Diameter	3 mm (3/32")
Free Speed	9000 rpm
Exhaust Type	Rear
Air Inlet	PF 1/4" Male
Hose I.D. Size	6.5 mm (1/4")
Air Pressure	6.3 kg/cm <sup>2</sup> (90 psi)
Avg. Air Cons.	0.26 m <sup>3</sup> /min (9.2 CFM)
Sound Level	81 dBA
Vibration	< 2.5 m/sec <sup>2</sup>
HP(W)	0.25 (187)
Measurement	L163 x H71.5 mm
Net Weight	0.9 kgs (1.98 lbs)
Packing	12pcs/ctn/1.58cu-ft/GW:18kg

Option : Vinyl face Pad  
Other type: Orbit Dia.: 1.5 mm (1/16") **CY-37201NL**



3mm (3/32")

## Self-Generated Vacuum

CY-372DL	
Velcro face Pad Size	123 mm (5")
Tool Spindle Thread	M5 x P0.8
Orbit Diameter	3 mm (3/32")
Free Speed	9000 rpm
Exhaust Type	Rear
Air Inlet	PF 1/4" Male
Hose I.D. Size	6.5 mm (1/4")
Air Pressure	6.3 kg/cm <sup>2</sup> (90 psi)
Avg. Air Cons.	0.26 m <sup>3</sup> /min (9.2 CFM)
Sound Level	83 dBA
Vibration	< 2.5 m/sec <sup>2</sup>
HP(W)	0.25 (187)
Measurement	L163 x H71.5 mm
Net Weight	0.9 kgs (1.98 lbs)
Packing	12pcs/ctn/2.2cu-ft/GW:20.5kg

Option : Vinyl face Pad  
Other type: Orbit Dia.: 1.5 mm (1/16") **CY-37201DL**



3mm (3/32")

## Non-Vacuum

CY-373N	
Pad Size	69 x 90 mm (3" x 4")
Orbit Diameter	3 mm (3/32")
Free Speed	9000 rpm
Exhaust Type	Rear
Air Inlet	PF 1/4" Male
Hose I.D. Size	6.5 mm (1/4")
Air Pressure	6.3 kg/cm <sup>2</sup> (90 psi)
Avg. Air Cons.	0.26 m <sup>3</sup> /min (9.2 CFM)
Sound Level	81 dBA
Vibration	< 2.5 m/sec <sup>2</sup>
HP(W)	0.25 (187)
Measurement	L148 x H72 mm
Net Weight	0.85 kgs (1.87 lbs)
Packing	12pcs/ctn/1.58cu-ft/GW:18kg

Other type: Orbit Dia.: 1.5 mm (1/16") **CY-37301N**



3mm (3/32")

## Self-Generated Vacuum

CY-373DL	
Velcro face Pad Size	69 x 90 mm (3" x 4")
Orbit Diameter	3 mm (3/32")
Free Speed	9000 rpm
Exhaust Type	Rear
Air Inlet	PF 1/4" Male
Hose I.D. Size	6.5 mm (1/4")
Air Pressure	6.3 kg/cm <sup>2</sup> (90 psi)
Avg. Air Cons.	0.26 m <sup>3</sup> /min (9.2 CFM)
Sound Level	83 dBA
Vibration	< 2.5 m/sec <sup>2</sup>
HP(W)	0.25 (187)
Measurement	L147 x H72 mm
Net Weight	0.85 kgs (1.87 lbs)
Packing	12pcs/ctn/2.2cu-ft/GW:20.5kg

Option : Vinyl face Pad  
Other type: Orbit Dia.: 1.5 mm (1/16") **CY-37301DL**



3mm (3/32")

## Non-Vacuum

CY-3731NM	
Vinyl face Pad Size	90 x 100 mm (3-1/2" x 4")
Orbit Diameter	3 mm (3/32")
Free Speed	9000 rpm
Exhaust Type	Rear
Air Inlet	PF 1/4" Male
Hose I.D. Size	6.5 mm (1/4")
Air Pressure	6.3 kg/cm <sup>2</sup> (90 psi)
Avg. Air Cons.	0.26 m <sup>3</sup> /min (9.2 CFM)
Sound Level	81 dBA
Vibration	< 2.5 m/sec <sup>2</sup>
HP(W)	0.25 (187)
Measurement	L150 x H72 mm
Net Weight	0.94 kgs (2.07 lbs)
Packing	12pcs/ctn/1.58cu-ft/GW:18kg

Option : Velcro face Pad  
Other type: Orbit Dia.: 1.5 mm (1/16") **CY-37311NM**



3mm (3/32")

## Non-Vacuum

CY-3735NM	
Vinyl face Pad Size	105 x 93 mm (4-1/8" x 4")
Orbit Diameter	3 mm (3/32")
Free Speed	9000 rpm
Exhaust Type	Rear
Air Inlet	PF 1/4" Male
Hose I.D. Size	6.5 mm (1/4")
Air Pressure	6.3 kg/cm <sup>2</sup> (90 psi)
Avg. Air Cons.	0.26 m <sup>3</sup> /min (9.2 CFM)
Sound Level	81 dBA
Vibration	< 2.5 m/sec <sup>2</sup>
HP(W)	0.25 (187)
Measurement	L146 x H72 mm
Net Weight	0.96 kgs (2.11 lbs)
Packing	12pcs/ctn/1.58cu-ft/GW:18kg

Option : Velcro face Pad  
Other type: Orbit Dia.: 1.5 mm (1/16") **CY-37351NM**



3mm (3/32")

## Non-Vacuum

CY-374NL	
Velcro face Pad Size	73 x 140 mm (3" x 6")
Orbit Diameter	3 mm (3/32")
Free Speed	9000 rpm
Exhaust Type	Rear
Air Inlet	PF 1/4" Male
Hose I.D. Size	6.5 mm (1/4")
Air Pressure	6.3 kg/cm <sup>2</sup> (90 psi)
Avg. Air Cons.	0.26 m <sup>3</sup> /min (9.2 CFM)
Sound Level	81 dBA
Vibration	< 2.5 m/sec <sup>2</sup>
HP(W)	0.25 (187)
Measurement	L174 x H71 mm
Net Weight	0.91 kgs (2 lbs)
Packing	12pcs/ctn/1.58cu-ft/GW:18kg

Option : Vinyl face Pad  
Other type: Orbit Dia.: 1.5 mm (1/16") **CY-37401NL**



3mm (3/32")

## Self-Generated Vacuum

CY-374DL	
Velcro face Pad Size	73 x 140 mm (3" x 6")
Orbit Diameter	3 mm (3/32")
Free Speed	9000 rpm
Exhaust Type	Rear
Air Inlet	PF 1/4" Male
Hose I.D. Size	6.5 mm (1/4")
Air Pressure	6.3 kg/cm <sup>2</sup> (90 psi)
Avg. Air Cons.	0.26 m <sup>3</sup> /min (9.2 CFM)
Sound Level	83 dBA
Vibration	< 2.5 m/sec <sup>2</sup>
HP(W)	0.25 (187)
Measurement	L172 x H71 mm
Net Weight	0.91 kgs (2 lbs)
Packing	12pcs/ctn/2.2cu-ft/GW:20.5kg

Option : Vinyl face Pad  
Other type: Orbit Dia.: 1.5 mm (1/16") **CY-37401DL**



3mm (3/32")

## Non-Vacuum

CY-2070N	
Pad Size	93 x 176 mm (3-1/2" x 7")
Orbit Diameter	2.5 mm (3/32")
Free Speed	9000 rpm
Exhaust Type	Rear
Air Inlet	1/4" PT
Hose I.D. Size	6.5 mm (1/4")
Air Pressure	6.3 kg/cm <sup>2</sup> (90 psi)
Avg. Air Cons.	0.3 m <sup>3</sup> /min (10.6 CFM)
Sound Level	79 dBA
Vibration	< 2.5 m/sec <sup>2</sup>
HP(W)	0.29 (217)
Measurement	L181 x H100 mm
Net Weight	1.1 kgs (2.42 lbs)
Packing	10pcs/ctn/2.4cu-ft/GW:18.5kg



2.5mm (3/32")

Other type: Orbit Dia.: 5 mm (3/16") **CY-20701N**

## Non-Vacuum

CY-2077N	
Pad Size	93 x 176 mm (3-1/2" x 7")
Orbit Diameter	2.5 mm (3/32")
Free Speed	9000 rpm
Exhaust Type	Rear
Air Inlet	1/4" PT
Hose I.D. Size	6.5 mm (1/4")
Air Pressure	6.3 kg/cm <sup>2</sup> (90 psi)
Avg. Air Cons.	0.3 m <sup>3</sup> /min (10.6 CFM)
Sound Level	79 dBA
Vibration	< 2.5 m/sec <sup>2</sup>
HP(W)	0.29 (217)
Measurement	L182 x H101 mm
Net Weight	1.2 kgs (2.64 lbs)
Packing	10pcs/ctn/2.4cu-ft/GW:18.5kg



2.5mm (3/32")

Other type: Orbit Dia.: 5 mm (3/16") **CY-20771N**

## Self-Generated Vacuum

CY-2070D	
Pad Size	93 x 176 mm (3-1/2" x 7")
Orbit Diameter	2.5 mm (3/32")
Free Speed	9000 rpm
Exhaust Type	Rear
Air Inlet	1/4" PT
Hose I.D. Size	6.5 mm (1/4")
Air Pressure	6.3 kg/cm <sup>2</sup> (90 psi)
Avg. Air Cons.	0.3 m <sup>3</sup> /min (10.6 CFM)
Sound Level	83 dBA
Vibration	< 2.5 m/sec <sup>2</sup>
HP(W)	0.29 (217)
Measurement	L257 x H100 mm
Net Weight	1.1 kgs (2.42 lbs)
Packing	10pcs/ctn/3.1cu-ft/GW:20kg



2.5mm (3/32")



1" Inner Thread



(Standard)



(Option)

Other type: Orbit Dia.: 5 mm (3/16") **CY-20701D**

## Self-Generated Vacuum

CY-2077D	
Pad Size	93 x 176 mm (3-1/2" x 7")
Orbit Diameter	2.5 mm (3/32")
Free Speed	9000 rpm
Exhaust Type	Rear
Air Inlet	1/4" PT
Hose I.D. Size	6.5 mm (1/4")
Air Pressure	6.3 kg/cm <sup>2</sup> (90 psi)
Avg. Air Cons.	0.3 m <sup>3</sup> /min (10.6 CFM)
Sound Level	83 dBA
Vibration	< 2.5 m/sec <sup>2</sup>
HP(W)	0.29 (217)
Measurement	L256 x H101 mm
Net Weight	1.2 kgs (2.64 lbs)
Packing	10pcs/ctn/3.1cu-ft/GW:20kg



2.5mm (3/32")



1" Inner Thread



(Standard)



(Option)

Other type: Orbit Dia.: 5 mm (3/16") **CY-20771D**

## Central Vacuum

CY-2070V	
Pad Size	93 x 176 mm (3-1/2" x 7")
Orbit Diameter	2.5 mm (3/32")
Free Speed	9000 rpm
Exhaust Type	Rear
Air Inlet	1/4" PT
Hose I.D. Size	6.5 mm (1/4")
Air Pressure	6.3 kg/cm <sup>2</sup> (90 psi)
Avg. Air Cons.	0.3 m <sup>3</sup> /min (10.6 CFM)
Sound Level	80 dBA
Vibration	< 2.5 m/sec <sup>2</sup>
HP(W)	0.29 (217)
Measurement	L222 x H100 mm
Net Weight	1.1 kgs (2.42 lbs)
Packing	10pcs/ctn/2.4cu-ft/GW:18.5kg



2.5mm (3/32")



1" Inner Thread

(Option)

Other type: Orbit Dia.: 5 mm (3/16") **CY-20701V**

## Central Vacuum

CY-2077V	
Pad Size	93 x 176 mm (3-1/2" x 7")
Orbit Diameter	2.5 mm (3/32")
Free Speed	9000 rpm
Exhaust Type	Rear
Air Inlet	1/4" PT
Hose I.D. Size	6.5 mm (1/4")
Air Pressure	6.3 kg/cm <sup>2</sup> (90 psi)
Avg. Air Cons.	0.3 m <sup>3</sup> /min (10.6 CFM)
Sound Level	80 dBA
Vibration	< 2.5 m/sec <sup>2</sup>
HP(W)	0.29 (217)
Measurement	L222 x H101 mm
Net Weight	1.2 kgs (2.64 lbs)
Packing	10pcs/ctn/2.4cu-ft/GW:18.5kg



2.5mm (3/32")



1" Inner Thread

(Option)

Other type: Orbit Dia.: 5 mm (3/16") **CY-20771V**

## ▶ Heavy Duty Random Orbital Sanders

### Non-Vacuum

CY-201N	
Pad Size	123 or 148 mm (5" or 6")
Tool Spindle Thread	5/16" - 24 Female
Orbit Diameter	5 mm (3/16")
Free Speed	10000 rpm
Exhaust Type	Rear
Air Inlet	1/4" PT
Hose I.D. Size	10 mm (3/8")
Air Pressure	6.3 kg/cm <sup>2</sup> (90 psi)
Avg. Air Cons.	0.4 m <sup>3</sup> /min (14.1 CFM)
Sound Level	82 dBA
Vibration	< 2.5 m/sec <sup>2</sup>
HP(W)	0.35 (262)
Pad Weight	5" : 100 g 6" : 120 g
Measurement	5" : L182 x H105 mm
Net Weight	1.4 kgs (3.08 lbs)
Packing	5" : 12pcs/ctn/2.2cu-ft/GW:20.5kg 6" : 12pcs/ctn/2.3cu-ft/GW:22.5kg



### Non-Vacuum

CY-202N	
Pad Size	123 or 148 mm (5" or 6")
Tool Spindle Thread	5/16" - 24 Female
Orbit Diameter	10 mm (3/8")
Free Speed	10000 rpm
Exhaust Type	Rear
Air Inlet	1/4" PT
Hose I.D. Size	10 mm (3/8")
Air Pressure	6.3 kg/cm <sup>2</sup> (90 psi)
Avg. Air Cons.	0.4 m <sup>3</sup> /min (14.1 CFM)
Sound Level	83 dBA
Vibration	< 2.5 m/sec <sup>2</sup>
HP(W)	0.35 (262)
Pad Weight	5" : 100 g 6" : 120 g
Measurement	5" : L235 x H115 mm
Net Weight	1.6 kgs (3.52 lbs)
Packing	6pcs/ctn/2.0cu-ft/GW:18kg



## ▶ Two-Hand Heavy Duty Random Orbital Sanders


### Self-Generated Vacuum

CY-203D	
Pad Size	123 or 148 mm (5" or 6")
Tool Spindle Thread	5/16" - 24 Female
Orbit Diameter	10 mm (3/8")
Free Speed	10000 rpm
Exhaust Type	Rear
Air Inlet	1/4" PT
Hose I.D. Size	10 mm (3/8")
Air Pressure	6.3 kg/cm <sup>2</sup> (90 psi)
Avg. Air Cons.	0.4 m <sup>3</sup> /min (14.1 CFM)
Sound Level	83 dBA
Vibration	< 2.5 m/sec <sup>2</sup>
HP(W)	0.35 (262)
Pad Weight	5" : 100 g 6" : 120 g
Measurement	5" : L243 x H115 mm
Net Weight	1.9 kgs (4.18 lbs)
Packing	6pcs/ctn/2.0cu-ft/GW:18kg



### Central Vacuum

CY-203V	
Pad Size	123 or 148 mm (5" or 6")
Tool Spindle Thread	5/16" - 24 Female
Orbit Diameter	10 mm (3/8")
Free Speed	10000 rpm
Exhaust Type	Rear
Air Inlet	1/4" PT
Hose I.D. Size	10 mm (3/8")
Air Pressure	6.3 kg/cm <sup>2</sup> (90 psi)
Avg. Air Cons.	0.4 m <sup>3</sup> /min (14.1 CFM)
Sound Level	81 dBA
Vibration	< 2.5 m/sec <sup>2</sup>
HP(W)	0.35 (262)
Pad Weight	5" : 100 g 6" : 120 g
Measurement	5" : L265 x H115 mm
Net Weight	1.96 kgs (4.31 lbs)
Packing	6pcs/ctn/2.0cu-ft/GW:18kg



Other type: Non Vacuum **CY-203N**

## ▶ Two-Hand Heavy Duty Random Orbital Sanders

### Non-Vacuum

CY-2051NL	
Velcro face Pad Size	98 x 400 mm
Orbit Diameter	5 mm
Free Speed	8000 rpm
Exhaust Type	Rear
Air Inlet	1/4" PT
Hose I.D. Size	10 mm (3/8")
Air Pressure	6.3 kg/cm <sup>2</sup> (90 psi)
Avg. Air Cons.	0.1 m <sup>3</sup> /min (3.5 CFM)
Sound Level	86 dBA
Vibration	< 2.5 m/sec <sup>2</sup>
Measurement	L400 x H116 mm
Net Weight	2.8 kgs (6.17 lbs)
Packing	6pcs/ctn/2.3cu-ft/GW:19kg



5mm (3/16")



**COMBEST**

## Two-Hand Jitterbug Orbital Sanders

### Self-Generated Vacuum

CY-204D	
Pad Size	93 x 176 mm (3-1/2" x 7")
Orbit Diameter	5 mm (3/16")
Free Speed	9000 rpm
Exhaust Type	Rear
Air Inlet	1/4" PT
Hose I.D. Size	10 mm (3/8")
Air Pressure	6.3 kg/cm <sup>2</sup> (90 psi)
Avg. Air Cons.	0.4 m <sup>3</sup> /min (14.1 CFM)
Sound Level	85 dBA
Vibration	< 2.5 m/sec <sup>2</sup>
HP(W)	0.35 (262)
Measurement	L294 x H115 mm
Net Weight	2.1 kgs (4.62 lbs)
Packing	6pcs/ctn/2.0cu-ft/GW:18kg

Other type: Central Vacuum **CY-204V**



### Non-Vacuum

CY-204N	
Pad Size	93 x 176 mm (3-1/2" x 7")
Orbit Diameter	5 mm (3/16")
Free Speed	9000 rpm
Exhaust Type	Rear
Air Inlet	1/4" PT
Hose I.D. Size	10 mm (3/8")
Air Pressure	6.3 kg/cm <sup>2</sup> (90 psi)
Avg. Air Cons.	0.4 m <sup>3</sup> /min (14.1 CFM)
Sound Level	85 dBA
Vibration	< 2.5 m/sec <sup>2</sup>
HP(W)	0.35 (262)
Measurement	L316 x H115 mm
Net Weight	2.1 kgs (4.62 lbs)
Packing	6pcs/ctn/2.0cu-ft/GW:18kg



### Self-Generated Vacuum

CY-205D	
Pad Size	112 x 220 mm (4-1/2" x 8-1/2")
Orbit Diameter	5 mm (3/16")
Free Speed	8000 rpm
Exhaust Type	Rear
Air Inlet	1/4" PT
Hose I.D. Size	10 mm (3/8")
Air Pressure	6.3 kg/cm <sup>2</sup> (90 psi)
Avg. Air Cons.	0.4 m <sup>3</sup> /min (14.1 CFM)
Sound Level	85 dBA
Vibration	< 2.5 m/sec <sup>2</sup>
HP(W)	0.35 (262)
Measurement	L298 x H120 mm
Net Weight	2.2 kgs (4.84 lbs)
Packing	6pcs/ctn/2.0cu-ft/GW:18kg

Other type: Central Vacuum **CY-205V**



### Non-Vacuum

CY-205N	
Pad Size	112 x 220 mm (4-1/2" x 8-1/2")
Orbit Diameter	5 mm (3/16")
Free Speed	8000 rpm
Exhaust Type	Rear
Air Inlet	1/4" PT
Hose I.D. Size	10 mm (3/8")
Air Pressure	6.3 kg/cm <sup>2</sup> (90 psi)
Avg. Air Cons.	0.4 m <sup>3</sup> /min (14.1 CFM)
Sound Level	85 dBA
Vibration	< 2.5 m/sec <sup>2</sup>
HP(W)	0.35 (262)
Measurement	L323 x H118 mm
Net Weight	2.2 kgs (4.84 lbs)
Packing	6pcs/ctn/2.0cu-ft/GW:18kg



## Two-Hand Gear-Driven Sanders

### Self-Generated Vacuum

CY-206DL	
Velcro face Pad Size	148 mm (6")
Tool Spindle Thread	M5 x 0.8
Orbit Diameter	5 mm (3/16")
Free Speed	900 rpm
Exhaust Type	Rear
Air Inlet	1/4" PT
Hose I.D. Size	10 mm (3/8")
Air Pressure	6.3 kg/cm <sup>2</sup> (90 psi)
Avg. Air Cons.	0.4 m <sup>3</sup> /min (14.1 CFM)
Sound Level	86 dBA
Vibration	< 2.5 m/sec <sup>2</sup>
HP(W)	0.35 (262)
Pad Weight	85 g
Measurement	L259 x H122 mm
Net Weight	1.88 kgs (4.14 lbs)
Packing	6pcs/ctn/2.0cu-ft/GW:18kg

Other type: Central Vacuum **CY-206VL**



### Central Vacuum

CY-206VL	
Velcro face Pad Size	148 mm (6")
Tool Spindle Thread	M5 x 0.8
Orbit Diameter	5 mm (3/16")
Free Speed	900 rpm
Exhaust Type	Rear
Air Inlet	1/4" PT
Hose I.D. Size	10 mm (3/8")
Air Pressure	6.3 kg/cm <sup>2</sup> (90 psi)
Avg. Air Cons.	0.4 m <sup>3</sup> /min (14.1 CFM)
Sound Level	83 dBA
Vibration	< 2.5 m/sec <sup>2</sup>
HP(W)	0.35 (262)
Pad Weight	85 g
Measurement	L280 x H122 mm
Net Weight	1.94 kgs (4.27 lbs)
Packing	6pcs/ctn/2.0cu-ft/GW:18kg



## Wet Air Orbital Sanders

### Wet Orbital Sander

CY-372WL	
Velcro face Pad Size	123 mm (5")
Tool Spindle Thread	M5 x P0.8
Orbit Diameter	3 mm (3/32")
Max. Free Speed	8000 rpm
Water Pipe I.D. x O.D.	ø4 x ø6 mm
Exhaust Type	Rear
Air Inlet	PF 1/4" Male
Hose I.D. Size	6.5 mm (1/4")
Air Pressure	6.3 kg/cm <sup>2</sup> (90 psi)
Avg. Air Cons.	0.2 m <sup>3</sup> /min (7.1 CFM)
Sound Level	81 dBA
Vibration	< 2.5 m/sec <sup>2</sup>
HP(W)	0.25 (187)
Measurement	L163 x H71.5 mm
Net Weight	0.92 kgs (2.02 lbs)
Packing	12pcs/ctn/1.58cu-ft/GW:18kg



3mm (3/32")

Other type: Orbit Dia.: 1.5 mm (1/16") **CY-37201WL**

### Wet Orbital Sander

CY-373WL	
Velcro face Pad Size	69 x 90 mm (3" x 4")
Tool Spindle Thread	M5 x P0.8
Orbit Diameter	3 mm (3/32")
Max. Free Speed	8000 rpm
Water Pipe I.D. x O.D.	ø4 x ø6 mm
Exhaust Type	Rear
Air Inlet	PF 1/4" Male
Hose I.D. Size	6.5 mm (1/4")
Air Pressure	6.3 kg/cm <sup>2</sup> (90 psi)
Avg. Air Cons.	0.26 m <sup>3</sup> /min (9.2 CFM)
Sound Level	81 dBA
Vibration	< 2.5 m/sec <sup>2</sup>
HP(W)	0.25 (187)
Measurement	L150 x H70 mm
Net Weight	0.92 kgs (2.02 lbs)
Packing	12pcs/ctn/1.58cu-ft/GW:18kg



3mm (3/32")

Other type: Orbit Dia.: 1.5 mm (1/16") **CY-37301WL**

### Wet Orbital Sander

CY-374WL	
Velcro face Pad Size	73 x 140 mm (3" x 6")
Tool Spindle Thread	M5 x P0.8
Orbit Diameter	3 mm (3/32")
Max. Free Speed	8000 rpm
Water Pipe I.D. x O.D.	ø4 x ø6 mm
Exhaust Type	Rear
Air Inlet	PF 1/4" Male
Hose I.D. Size	6.5 mm (1/4")
Air Pressure	6.3 kg/cm <sup>2</sup> (90 psi)
Avg. Air Cons.	0.26 m <sup>3</sup> /min (9.2 CFM)
Sound Level	81 dBA
Vibration	< 2.5 m/sec <sup>2</sup>
HP(W)	0.25 (187)
Measurement	L173 x H72 mm
Net Weight	0.93 kgs (2.05 lbs)
Packing	12pcs/ctn/1.58cu-ft/GW:18kg



3mm (3/32")

Other type: Orbit Dia.: 1.5 mm (1/16") **CY-37401WL**

### Wet Orbital Sander

CY-3813WL	
Velcro face Pad Size	70 x 92 mm (3" x 4")
Tool Spindle Thread	M5 x P0.8
Orbit Diameter	3 mm (3/32")
Max. Free Speed	7000 rpm
Water Pipe I.D. x O.D.	ø4 x ø6 mm
Exhaust Type	Rear
Air Inlet	PF 1/4" Male
Hose I.D. Size	6.5 mm (1/4")
Air Pressure	6.3 kg/cm <sup>2</sup> (90 psi)
Avg. Air Cons.	0.26 m <sup>3</sup> /min (9.2 CFM)
Sound Level	81 dBA
Vibration	< 2.5 m/sec <sup>2</sup>
HP(W)	0.25 (187)
Measurement	L145 x H75 mm
Net Weight	0.73 kgs (1.61 lbs)
Packing	12pcs/ctn/1.58cu-ft/GW:18kg



3mm (3/32")

Other type: Orbit Dia.: 1.5 mm (1/16") **CY-38131WL**

## Orbital Delta Sanders

### Delta Sander

CY-2563AL	
Velcro face Pad Size	W70 x L77 mm
Orbit Diameter	3 mm (3/32")
Free Speed	13000 rpm
Exhaust Type	Rear
Air Inlet	1/4" PT
Hose I.D. Size	6.5 mm (1/4")
Air Pressure	6.3 kg/cm <sup>2</sup> (90 psi)
Avg. Air Cons.	0.4 m <sup>3</sup> /min (14.1 CFM)
Sound Level	81 dBA
Vibration	1.2 m/sec <sup>2</sup>
HP(W)	0.2 (150)
Measurement	L216 x H95 mm
Net Weight	0.83 kgs (1.83 lbs)
Packing	12pcs/ctn/1.58cu-ft/GW:18kg



3mm (3/32")

Other type: Orbit Dia.: 1.5 mm (1/16") **CY-25631AL**

### Delta Sander

CY-2565AL	
Velcro face Pad Size	W70 x L77 mm
Orbit Diameter	3 mm (3/32")
Free Speed	13000 rpm
Exhaust Type	Rear
Air Inlet	1/4" PT
Hose I.D. Size	6.5 mm (1/4")
Air Pressure	6.3 kg/cm <sup>2</sup> (90 psi)
Avg. Air Cons.	0.4 m <sup>3</sup> /min (14.1 CFM)
Sound Level	81 dBA
Vibration	1.2 m/sec <sup>2</sup>
HP(W)	0.2 (150)
Measurement	L205 x H95 mm
Net Weight	0.83 kgs (1.83 lbs)
Packing	12pcs/ctn/1.58cu-ft/GW:18kg




3mm (3/32")

Other type: Orbit Dia.: 1.5 mm (1/16") **CY-25651AL**

### Delta Sander

CY-3813TL34	
Velcro face Pad Size	W70 x L100 mm
Spindle Thread	M5 x P0.8
Orbit Diameter	3 mm (3/32")
Free Speed	9000 rpm
Exhaust Type	Rear
Air Inlet	PF 1/4" Male
Hose I.D. Size	6.5 mm (1/4")
Air Pressure	6.3 kg/cm <sup>2</sup> (90 psi)
Avg. Air Cons.	0.26 m <sup>3</sup> /min (9.2 CFM)
Sound Level	81 dBA
Vibration	< 2.5 m/sec <sup>2</sup>
HP(W)	0.25 (187)
Measurement	L161 x H73 mm
Net Weight	0.7 kgs (1.54 lbs)
Packing	12pcs/ctn/1.58cu-ft/GW:18kg



3mm (3/32")

Option : Vinyl face Pad  
Other type: W90 x L130 mm **CY-3813TL45**

### Detail Sander

CY-38401L	
Velcro face Pad Size	W78 x L75 mm
Orbit Diameter	3 mm (3/32")
Free Speed	16000 rpm
Exhaust Type	Rear
Air Inlet	1/4" PT
Hose I.D. Size	6.5 mm (1/4")
Air Pressure	6.3 kg/cm <sup>2</sup> (90 psi)
Avg. Air Cons.	0.35 m <sup>3</sup> /min (12.4 CFM)
Sound Level	83 dBA
Vibration	< 2.5 m/sec <sup>2</sup>
HP(W)	0.15 (110)
Measurement	L236 x H92 mm
Net Weight	0.75 kgs (1.65 lbs)
Packing	10pcs/ctn/0.8cu-ft/GW:9kg



3mm (3/32")

Option : Vinyl face Pad

## Free Sanders

### Palm Sander

CY-342M	
Vinyl face Pad Size	75 x 82 mm (3" x 3-1/8")
Orbit Diameter	Max. 1.2 mm
Free Speed	15000 rpm
Air Inlet	1/4" PT
Hose I.D. Size	6.5 mm (1/4")
Air Pressure	6.3 kg/cm <sup>2</sup> (90 psi)
Avg. Air Cons.	0.02 m <sup>3</sup> /min (0.8 CFM)
Sound Level	77 dBA
Vibration	< 2.5 m/sec <sup>2</sup>
Measurement	L148 x H75 mm
Net Weight	0.5 kgs (1.1 lbs)
Packing	20pcs/ctn/2.3cu-ft/GW:17kg



### Palm Sander

CY-343M	
Vinyl face Pad Size	100 x 110 mm (4" x 4-3/8")
Orbit Diameter	Max. 1.5 mm
Free Speed	20000 rpm
Air Inlet	1/4" PT
Hose I.D. Size	6.5 mm (1/4")
Air Pressure	6.3 kg/cm <sup>2</sup> (90 psi)
Avg. Air Cons.	0.03 m <sup>3</sup> /min (1 CFM)
Sound Level	84 dBA
Vibration	< 2.5 m/sec <sup>2</sup>
Measurement	L130 x H80 mm
Net Weight	0.5 kgs (1.1 lbs)
Packing	20pcs/ctn/2.3cu-ft/GW:18kg



## In-Line Finishing Sanders

### Linear Sander

CY-2301A	
Pad Size	57 x 100 mm
Stroke	4 mm
Stroke Speed	4000 min <sup>-1</sup>
Exhaust Type	Rear
Air Inlet	1/4" PT
Hose I.D. Size	6.5 mm (1/4")
Air Pressure	6.3 kg/cm <sup>2</sup> (90 psi)
Avg. Air Cons.	0.11 m <sup>3</sup> /min (3.9 CFM)
Sound Level	81 dBA
Vibration	< 2.5 m/sec <sup>2</sup>
Measurement	L155 x H75 mm
Net Weight	0.7 kgs (1.54 lbs)
Packing	12pcs/ctn/1.58cu-ft/GW:18kg



### Linear Sander

CY-2301B	
Pad Size	57 x 100 mm
Stroke	4 mm
Stroke Speed	4000 min <sup>-1</sup>
Exhaust Type	Rear
Air Inlet	1/4" PT
Hose I.D. Size	10 mm (3/8")
Air Pressure	6.3 kg/cm <sup>2</sup> (90 psi)
Avg. Air Cons.	0.11 m <sup>3</sup> /min (3.9 CFM)
Sound Level	81 dBA
Vibration	< 2.5 m/sec <sup>2</sup>
Measurement	L150 x H67 mm
Net Weight	0.7 kgs (1.54 lbs)
Packing	10pcs/ctn/3.1cu-ft/GW:20kg



CY-2301A			
Standard A Type	A2301-2904 Base Plate	A2301-88B Block Rubber Pad	#320 Sandpaper x5pcs #240 Sandpaper x5pcs

CY-2301B			
Standard B Type	A2301-2904 Base Plate	Block Rubber Pad x 6 pcs 2301-830, 2301-831, 2301-832 2301-833, 2301-834, 2301-835	#320 Sandpaper x1pc

### Straight Line Air Sander (Big Type)

	CY-2302M	CY-2303M
Pad Size	70 x 445 (2-1/2" x 15-3/4")	70 x 445 (2-1/2" x 15-3/4")
Stroke	25mm (1")	25mm (1")
Stroke Speed	2100 min <sup>-1</sup>	3000 min <sup>-1</sup>
Air Inlet	1/4" PT	1/4" PT
Hose I.D. Size	10 mm (3/8")	10 mm (3/8")
Air Pressure	6.3 kg/cm <sup>2</sup> (90 psi)	6.3 kg/cm <sup>2</sup> (90 psi)
Avg. Air Cons.	0.14 m <sup>3</sup> /min (5 CFM)	0.14 m <sup>3</sup> /min (5 CFM)
Sound Level	80 dBA	80 dBA
Vibration	< 2.5 m/sec <sup>2</sup>	< 2.5 m/sec <sup>2</sup>
Measurement	L405 x H160 mm	L405 x H153 mm
Net Weight	2.8 kgs (6.16 lbs)	2.99 kgs (6.58 lbs)
Packing	5 pcs/ctn/1.3 cu-ft / GW:15kg	5 pcs/ctn/1.3 cu-ft / GW:17kg



CY-2302M



CY-2303M

## Right Angle Sander

CY-2552A	
Pad Size	3" (2" Option)
Tool Spindle Thread	5/16" - 24 Female
Free Speed	15000 rpm
Exhaust Type	Rear
Air Inlet	1/4" PT
Hose I.D. Size	6.5 mm (1/4")
Air Pressure	6.3 kg/cm <sup>2</sup> (90 psi)
Avg. Air Cons.	0.4 m <sup>3</sup> /min (14.1 CFM)
Sound Level	79 dBA
Vibration	0.9 m/sec <sup>2</sup>
HP(W)	0.2 (150)
Pad Weight	28 g
Measurement	L190 x H110 mm
Net Weight	0.65 kgs (1.43 lbs)
Packing	20pcs/ctn/1.24cu-ft/GW:20kg



Option



2" Pad

## Right Angle Sander

CY-2553A	
Pad Size	3" (2" Option)
Tool Spindle Thread	5/16" - 24 Female
Free Speed	15000 rpm
Exhaust Type	Rear
Air Inlet	1/4" PT
Hose I.D. Size	6.5 mm (1/4")
Air Pressure	6.3 kg/cm <sup>2</sup> (90 psi)
Avg. Air Cons.	0.4 m <sup>3</sup> /min (14.1 CFM)
Sound Level	79 dBA
Vibration	0.9 m/sec <sup>2</sup>
HP(W)	0.2 (150)
Pad Weight	28 g
Measurement	L190 x H110 mm
Net Weight	0.65 kgs (1.43 lbs)
Packing	20pcs/ctn/1.24cu-ft/GW:20kg



Option



2" Pad

## Orbital Sanders

### Right Angle Orbital Sander

CY-3830A	
Pad Size	3" (2" Option)
Tool Spindle Thread	M6 Female
Orbit Diameter	3 mm (3/32")
Free Speed	15000 rpm
Exhaust Type	Rear
Air Inlet	1/4" PT
Hose I.D. Size	6.5 mm (1/4")
Air Pressure	6.3 kg/cm <sup>2</sup> (90 psi)
Avg. Air Cons.	0.4 m <sup>3</sup> /min (14.1 CFM)
Sound Level	73 dBA
Vibration	< 2.5 m/sec <sup>2</sup>
HP(W)	0.2 (150)
Pad Weight	25 g
Measurement	L178 x H95 mm
Net Weight	0.74 kgs (1.63 lbs)
Packing	20pcs/ctn/1.24cu-ft/ GW:20kg



3mm (3/32")

Option



2" Pad

### Right Angle Orbital Sander

CY-3831A	
Pad Size	3" (2" Option)
Tool Spindle Thread	M6 Female
Orbit Diameter	3 mm (3/32")
Free Speed	15000 rpm
Exhaust Type	Rear
Air Inlet	1/4" PT
Hose I.D. Size	6.5 mm (1/4")
Air Pressure	6.3 kg/cm <sup>2</sup> (90 psi)
Avg. Air Cons.	0.4 m <sup>3</sup> /min (14.1 CFM)
Sound Level	73 dBA
Vibration	< 2.5 m/sec <sup>2</sup>
HP(W)	0.2 (150)
Pad Weight	25 g
Measurement	L189 x H95 mm
Net Weight	0.71 kgs (1.56 lbs)
Packing	20pcs/ctn/1.24cu-ft/ GW:20kg



3mm (3/32")

Option



2" Pad

Other type: Orbit Dia.: 1.5mm (1/16") **CY-38301A**

Other type: Orbit Dia.: 1.5mm (1/16") **CY-38311A**

### Right Angle Mini-Orbital Sander

CY-5200AL	
Velcro face Pad Size	30 mm
Tool Spindle Thread	M10 x 1.25 (Female)
Orbit Diameter	1.5 mm (1/16")
Free Speed	7500 rpm
Exhaust Type	Rear
Air Inlet	1/4" PT
Hose I.D. Size	6.5 mm (1/4")
Air Pressure	6.3 kg/cm <sup>2</sup> (90 psi)
Avg. Air Cons.	0.15 m <sup>3</sup> /min (5.3 CFM)
Sound Level	82 dBA
Vibration	< 2.5 m/sec <sup>2</sup>
HP(W)	0.15 (110)
Pad Weight	5 g
Measurement	L165 x H80 mm
Net Weight	0.58 kgs (1.28 lbs)
Packing	20pcs/ctn/0.73cu-ft/ GW:14kg



1.5mm (1/16")

Option: Vinyl face Pad  
Other type: Free Speed 20000rpm **CY-5200BL**

### Right Angle Disc Sander

CY-2550A	
Pad Size	3" (2" Option)
Tool Spindle Thread	1/4" - 20 Male
Free Speed	15000 rpm
Exhaust Type	Rear
Air Inlet	1/4" PT
Hose I.D. Size	6.5 mm (1/4")
Air Pressure	6.3 kg/cm <sup>2</sup> (90 psi)
Avg. Air Cons.	0.4 m <sup>3</sup> /min (14.1 CFM)
Sound Level	79 dBA
Vibration	0.9 m/sec <sup>2</sup>
HP(W)	0.2 (150)
Measurement	L178 x H110 mm
Net Weight	0.65 kgs (1.43 lbs)
Packing	20pcs/ctn/1.24cu-ft/GW:20kg



Including Locking-Type Pad



### Right Angle Disc Sander

CY-2551A	
Pad Size	3" (2" Option)
Tool Spindle Thread	1/4" - 20 Male
Free Speed	15000 rpm
Exhaust Type	Rear
Air Inlet	1/4" PT
Hose I.D. Size	6.5 mm (1/4")
Air Pressure	6.3 kg/cm <sup>2</sup> (90 psi)
Avg. Air Cons.	0.4 m <sup>3</sup> /min (14.1 CFM)
Sound Level	79 dBA
Vibration	0.9 m/sec <sup>2</sup>
HP(W)	0.2 (150)
Measurement	L190 x H110 mm
Net Weight	0.65 kgs (1.43 lbs)
Packing	20pcs/ctn/1.24cu-ft/GW:20kg



Including Locking-Type Pad



### Right Angle Disc Sander

CY-2554	
Pad Size	3" (2" Option)
Tool Spindle Thread	1/4" - 20 Male
Free Speed	18000 rpm
Exhaust Type	Rear
Air Inlet	1/4" PT
Hose I.D. Size	6.5 mm (1/4")
Air Pressure	6.3 kg/cm <sup>2</sup> (90 psi)
Avg. Air Cons.	0.06m <sup>3</sup> /min (2 CFM)
Sound Level	78 dBA
Vibration	0.9 m/sec <sup>2</sup>
HP(W)	0.2 (150)
Measurement	L200 x H100 mm
Net Weight	0.96 kgs (2.11 lbs)
Packing	20pcs/ctn/1.2cu-ft/GW:20kg



Including Locking-Type Pad

## Finger Sanders

### Finger Sander

CY-2560A	
Orbit Diameter	3 mm (3/32")
Free Speed	13000 rpm
Exhaust Type	Rear
Air Inlet	1/4" PT
Hose I.D. Size	6.5mm (1/4")
Air Pressure	6.3 kg/cm <sup>2</sup> (90 psi)
Avg. Air Cons.	0.4 m <sup>3</sup> /min (14.1 CFM)
Sound Level	81 dBA
Vibration	1.2 m/sec <sup>2</sup>
HP(W)	0.2 (150)
Measurement	L200 x H100 mm
Net Weight	0.82 kgs (1.80 lbs)
Packing	20pcs/ctn/1.24cu-ft/GW:20kg



- Pad Size:
1. 22 x 50 mm
  2. 17 x 65 mm
  3. 17 x 65 mm

Other type: Orbit Dia.: 1.5mm (1/16") **CY-25601A**

### Long Finger Sander

CY-3734	
Pad Size	30 x 60 mm
Orbit Diameter	3 mm (3/32")
Free Speed	9000 rpm
Exhaust Type	Rear
Air Inlet	PF 1/4" Male
Hose I.D. Size	6.5 mm (1/4")
Air Pressure	6.3 kg/cm <sup>2</sup> (90 psi)
Avg. Air Cons.	0.26 m <sup>3</sup> /min (9.2 CFM)
Sound Level	81 dBA
Vibration	< 2.5 m/sec <sup>2</sup>
HP(W)	0.25(187)
Measurement	L289 x H70 mm
Net Weight	0.9 kgs (1.98 lbs)
Packing	12pcs/ctn/1.4cu-ft/GW:15kg




3mm (3/32")

Other type: Orbit Dia.: 1.5mm (1/16") **CY-37341**

### Finger Sander


CY-2562AL	
Velcro face Pad Size	40 x 85 mm
Orbit Diameter	3 mm (3/32")
Free Speed	13000 rpm
Exhaust Type	Rear
Air Inlet	1/4" PT
Hose I.D. Size	6.5mm (1/4")
Air Pressure	6.3 kg/cm <sup>2</sup> (90 psi)
Avg. Air Cons.	0.4 m <sup>3</sup> /min (14.1 CFM)
Sound Level	81 dBA
Vibration	1.2 m/sec <sup>2</sup>
HP(W)	0.2 (150)
Measurement	L222 x H90 mm
Net Weight	0.8 kgs (1.83 lbs)
Packing	12pcs/ctn/1.1cu-ft/GW:11kg

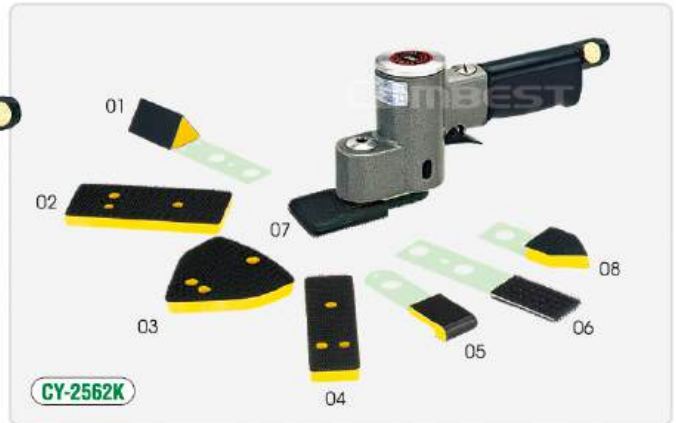

Other type: Orbit Dia.: 1.5mm (1/16") **CY-25621AL**

### Finger Sander

CY-2564AL	
Velcro face Pad Size	40 x 85 mm
Orbit Diameter	3 mm (3/32")
Free Speed	13000 rpm
Exhaust Type	Rear
Air Inlet	1/4" PT
Hose I.D. Size	6.5mm (1/4")
Air Pressure	6.3 kg/cm <sup>2</sup> (90 psi)
Avg. Air Cons.	0.4 m <sup>3</sup> /min (14.1 CFM)
Sound Level	81 dBA
Vibration	1.2 m/sec <sup>2</sup>
HP(W)	0.2 (150)
Measurement	L222 x H90 mm
Net Weight	0.83 kgs (1.83 lbs)
Packing	12pcs/ctn/1.1cu-ft/GW:11kg

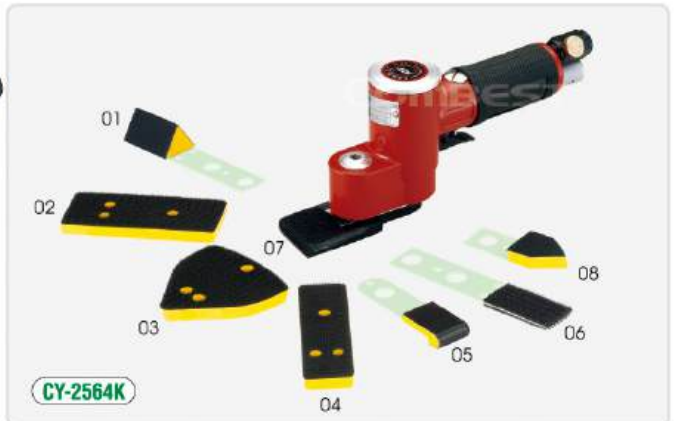

Other type: Orbit Dia.: 1.5mm (1/16") **CY-25641AL**



## Mini Belt Sander

CY-3910	
Belt Size	20 x 520 mm
Motor Free Speed	16000 rpm
Belt Speed	7900 FPM (2400 m/min)
Exhaust Type	Rear
Air Inlet	1/4" PT
Hose I.D. Size	10 mm (3/8")
Air Pressure	6.3 kg/cm <sup>2</sup> (90 psi)
Avg. Air Cons.	0.52 m <sup>3</sup> /min (18.4 CFM)
Sound Level	88 dBA
Vibration	<2.5 m/sec <sup>2</sup>
HP(W)	0.25 (187)
Folded Length	250 mm
Measurement	L355 x H60 mm
Net Weight	1.16 kgs (2.55 lbs)
Packing	10pcs/ctn/1.6cu-ft/GW:15kg



## Mini Belt Sander

CY-3911	
Belt Size	10 x 330 mm
Motor Free Speed	16000 rpm
Belt Speed	3470 FPM (1050 m/min)
Exhaust Type	Rear
Air Inlet	1/4" PT
Hose I.D. Size	10 mm (3/8")
Air Pressure	6.3 kg/cm <sup>2</sup> (90 psi)
Avg. Air Cons.	0.4 m <sup>3</sup> /min (14.1 CFM)
Sound Level	85 dBA
Vibration	<2.5 m/sec <sup>2</sup>
HP(W)	0.25 (187)
Folded Length	157 mm
Measurement	L282 x H53 mm
Net Weight	0.81 kgs (1.78 lbs)
Packing	20pcs/ctn/1.7cu-ft/GW:21kg



## Mini Belt Sander

CY-3912	
Belt Size	20 x 520 mm
Motor Free Speed	16000 rpm
Belt Speed	7900 FPM (2400 m/min)
Exhaust Type	Rear
Air Inlet	1/4" PT
Hose I.D. Size	10 mm (3/8")
Air Pressure	6.3 kg/cm <sup>2</sup> (90 psi)
Avg. Air Cons.	0.52 m <sup>3</sup> /min (18.4 CFM)
Sound Level	88 dBA
Vibration	< 2.5 m/sec <sup>2</sup>
HP(W)	0.25 (187)
Folded Length	250 mm
Measurement	L355 x H68 mm
Net Weight	1.16 kgs (2.55 lbs)
Packing	10pcs/ctn/1.6cu-ft/GW:15kg



## Mini Belt Sander

CY-3913	
Belt Size	30 x 540 mm
Motor Free Speed	14000 rpm
Belt Speed	7000 FPM (2150 m/min)
Exhaust Type	Rear
Air Inlet	1/4" PT
Hose I.D. Size	10 mm (3/8")
Air Pressure	6.3 kg/cm <sup>2</sup> (90 psi)
Avg. Air Cons.	0.68 m <sup>3</sup> /min (24 CFM)
Sound Level	89 dBA
Vibration	< 2.5 m/sec <sup>2</sup>
HP(W)	0.45 (340)
Folded Length	262 mm
Measurement	L435 x H100 mm
Net Weight	2.39 kgs (5.26 lbs)
Packing	6pcs/ctn/1.1cu-ft/GW:16kg



## Mini Belt Sander 7900 FPM (2400 m/min)

CY-3921	
Belt Size	10 x 330 mm
Motor Free Speed	16000 rpm
Belt Speed	3470 FPM (1050 m/min)
Exhaust Type	Rear
Air Inlet	1/4" PT
Hose I.D. Size	10 mm (3/8")
Air Pressure	6.3 kg/cm <sup>2</sup> (90 psi)
Avg. Air Cons.	0.4 m <sup>3</sup> /min (14.1 CFM)
Sound Level	85 dBA
Vibration	< 2.5 m/sec <sup>2</sup>
HP(W)	0.25 (187)
Folded Length	157 mm
Measurement	L282 x H53 mm
Net Weight	0.81 kgs (1.78 lbs)
Packing	20pcs/ctn/1.7cu-ft/GW:21kg



## Mini Belt Sander

CY-3922	
Belt Size	20 x 520 mm
Motor Free Speed	16000 rpm
Belt Speed	7900 FPM (2400 m/min)
Exhaust Type	Rear
Air Inlet	1/4" PT
Hose I.D. Size	10 mm (3/8")
Air Pressure	6.3 kg/cm <sup>2</sup> (90 psi)
Avg. Air Cons.	0.52 m <sup>3</sup> /min (18.4 CFM)
Sound Level	88 dBA
Vibration	< 2.5 m/sec <sup>2</sup>
HP(W)	0.25 (187)
Folded Length	250 mm
Measurement	L355 x H68 mm
Net Weight	1.16 kgs (2.55 lbs)
Packing	10pcs/ctn/1.6cu-ft/GW:15kg



## Mini Belt Sander

CY-3923	
Belt Size	20 x 520 mm
Motor Free Speed	16000 rpm
Belt Speed	7900 FPM(2400 m/min)
Exhaust Type	Rear
Air Inlet	1/4" PT
Hose I.D. Size	10 mm (3/8")
Air Pressure	6.3 kg/cm <sup>2</sup> (90 psi)
Avg. Air Cons.	0.52 m <sup>3</sup> /min (18.4 CFM)
Sound Level	88 dBA
Vibration	< 2.5 m/sec <sup>2</sup>
HP(W)	0.25 (187)
Folded Length	250 mm
Measurement	L355 x H60 mm
Net Weight	1.16 kgs (2.55 lbs)
Packing	10pcs/ctn/1.6cu-ft/GW:15kg



## Roll Belt Sander

CY-39360	
Belt Size	60 x 260 mm
Motor Free Speed	7000 rpm
Belt Speed	3600 FPM (1100 m/min)
Roller Size	60 x ø50 mm
Tool Spindle Size	ø8
Exhaust Type	Rear
Air Inlet	1/4" PT
Hose I.D. Size	10 mm (3/8")
Air Pressure	6.3 kg/cm <sup>2</sup> (90 psi)
Avg. Air Cons.	0.30 m <sup>3</sup> /min (10.6 CFM)
Sound Level	89 dBA
Vibration	0.9 m/sec <sup>2</sup>
HP(W)	0.25 (187)
Measurement	L170 x H115 x W100 mm
Net Weight	1.1 kgs (2.42 lbs)
Packing	12pcs/ctn/2.6cu-ft/GW:22kg



Other type: Free Speed : 15000 rpm **CY-39361**

**7" Vertical Polisher**

CY-2700	
Disc Size	180 mm (7")
Tool Spindle Thread	5/8" - 11 Male
Free Speed	4200 rpm
Exhaust Type	Side
Air Inlet	1/4" PT
Hose I.D. Size	10 mm (3/8")
Air Pressure	6.3 kg/cm <sup>2</sup> (90 psi)
Avg. Air Cons.	0.7 m <sup>3</sup> /min (24.5 CFM)
Noise Level	88 dBA
Vibration	<2.5 m/sec <sup>2</sup>
Measurement	L190 x H183 mm
Net Weight	2.1 Kgs (5.72 lbs)
Packing	8pcs/ctn/1.2cu-ft/GW:26.8kg


**5" Vertical Polisher**

CY-2701	
Disc Size	125 mm (5") or 148 mm (6")
Tool Spindle Thread	5/16" - 24 Male
Free Speed	3000 rpm
Exhaust Type	Rear
Air Inlet	1/4" Male
Hose I.D. Size	10 mm (3/8")
Air Pressure	5 - 7 kg/cm <sup>2</sup> (90 psi)
Avg. Air Cons.	0.17 m <sup>3</sup> /min (6 CFM)
Noise Level	82 dBA
Vibration	<2.5 m/sec <sup>2</sup>
Measurement	L215 x H165 mm
Net Weight	0.97Kgs (2.13 lbs)
Packing	10pcs/ctn/1.2cu-ft/GW:14kg


**5" Vertical Polisher**

CY-2702	
Disc Size	125 mm (5")
Tool Spindle Thread	5/16" - 24 Male
Free Speed	3000 rpm
Exhaust Type	Side
Air Inlet	1/4" Female
Hose I.D. Size	6.5 mm (1/4")
Air Pressure	5 - 7 kg/cm <sup>2</sup> (90 psi)
Avg. Air Cons.	0.1 m <sup>3</sup> /min (3.65 CFM)
Measurement	L205 x H160 mm
Net Weight	1.12 kgs (2.46 lbs)
Packing	10pcs/ctn/1.2cu-ft/GW:14.5kg



Option : Tool Spindle Thread 5/8"-11 Male

**Roll Polisher**

CY-27360	
Roll Size	50 x ø50 mm
Tool Spindle Size	ø8
Free Speed	15000 rpm
Exhaust Type	Rear
Air Inlet	1/4" PT
Hose I.D. Size	10 mm (3/8")
Air Pressure	6.3 kg/cm <sup>2</sup> (90 psi)
Avg. Air Cons.	0.3 m <sup>3</sup> /min (0.6 CFM)
Noise Level	89 dBA
Vibration	<2.5 m/sec <sup>2</sup>
HP(W)	0.25 (187)
Measurement	L180 x H142 mm
Net Weight	1.03 kgs (2.31 lbs)
Packing	12pcs/ctn/2.6cu-ft/GW:22kg



Excluding Polishing Roll

Other type: Free Speed: 7000 rpm **CY-27361**

**7" Heavy Duty Right Angle Polisher**

CY-2730	
Disc Size	180 mm (7")
Tool Spindle Thread	5/8" - 11 Male
Free Speed	2800 rpm
Exhaust Type	Side
Air Inlet	1/4" PT
Hose I.D. Size	10 mm (3/8")
Air Pressure	6.3 kg/cm <sup>2</sup> (90 psi)
Avg. Air Cons.	0.17 m <sup>3</sup> /min (6 CFM)
Noise Level	85 dBA
Vibration	1.1 m/sec <sup>2</sup>
HP(W)	1.05 (787)
Measurement	L406 x H99 mm
Net Weight	1.98 kgs (4.36 lbs)
Packing	6pcs/ctn/1.75cu-ft/GW:16kg



Excluding Wool

**Heavy Duty Right Angle Polisher**

CY-27520	
Disc Size	73 - 148 mm (3" - 6")
Tool Spindle Thread	5/16" - 24 Female
Free Speed	2500 rpm
Exhaust Type	Rear
Air Inlet	1/4" PT
Hose I.D. Size	10 mm (3/8")
Air Pressure	6.3 kg/cm <sup>2</sup> (90 psi)
Avg. Air Cons.	0.3 m <sup>3</sup> /min (10.5 CFM)
Noise Level	85 dBA
Vibration	< 2.5 m/sec <sup>2</sup>
Measurement	L203 x H81 mm
Net Weight	1.36 kgs (2.99 lbs)
Packing	10pcs/ctn/1.4cu-ft/GW:13kg



Excluding Pad



Option

## 7" Heavy Duty Right Angle Polisher

CY-27A1	
Disc Size	180 mm (7")
Tool Spindle Thread	5/8" - 11 Male or M14
Free Speed	2500 rpm
Exhaust Type	Side
Air Inlet	1/4" PT
Hose I.D. Size	10 mm (3/8")
Air Pressure	6.3 kg/cm <sup>2</sup> (90 psi)
Avg. Air Cons.	0.45 m <sup>3</sup> /min (15.75 CFM)
Noise Level	90 dBA
Vibration	<2.5 m/sec <sup>2</sup>
Measurement	L453 x H100 mm
Net Weight	2.9 kgs (6.38 lbs)
Packing	6pcs/ctn/1.65cu-ft/GW:19kg



## 2" - 3" Mini Right Angle Polisher

CY-2750A	
Disc Size	3"
Tool Spindle Thread	5/16" - 24 Female
Free Speed	2500 rpm
Exhaust Type	Rear
Air Inlet	1/4" PT
Hose I.D. Size	6.5 mm (1/4")
Air Pressure	6.3 kg/cm <sup>2</sup> (90 psi)
Avg. Air Cons.	0.4 m <sup>3</sup> /min (14.1 CFM)
Noise Level	76 dBA
Vibration	0.8 m/sec <sup>2</sup>
HP(W)	0.2 (150)
Measurement	L178 x H115 mm
Net Weight	0.81 kgs (1.78 lbs)
Packing	20pcs/ctn/1.24cu-ft/GW:20kg



## 2" - 3" Mini Right Angle Polisher

CY-2751A	
Disc Size	3"
Tool Spindle Thread	5/16" - 24 Female
Free Speed	2500 rpm
Exhaust Type	Rear
Air Inlet	1/4" PT
Hose I.D. Size	6.5 mm (1/4")
Air Pressure	6.3 kg/cm <sup>2</sup> (90 psi)
Avg. Air Cons.	0.4 m <sup>3</sup> /min (14.1 CFM)
Noise Level	76 dBA
Vibration	0.8 m/sec <sup>2</sup>
HP(W)	0.2 (150)
Measurement	L178 x H115 mm
Net Weight	0.81 kgs (1.78 lbs)
Packing	20pcs/ctn/1.24cu-ft/GW:20kg



## 2" - 3" Mini Right Angle Polisher

CY-27450	
Disc Size	2" or 3"
Tool Spindle Thread	5/16" - 24 Female
Free Speed	5000 rpm
Exhaust Type	Rear
Air Inlet	1/4" Male
Hose I.D. Size	6.5 mm (1/4")
Air Pressure	5 - 7 kg/cm <sup>2</sup> (90 psi)
Avg. Air Cons.	0.35 m <sup>3</sup> /min (12.25 CFM)
Noise Level	79 dBA
Vibration	0.8 m/sec <sup>2</sup>
Measurement	L195 x W72 x H72 mm
Net Weight	0.9 kgs (1.98 lbs)
Packing	10pcs/ctn/1cu-ft/GW:9kg



EFFICIENT, DURABLE

NEW PRODUCTS

AIR SANDERS

AIR TOOLS

VACUUM CLEANER

ACCESSORIES

**Air File & Saw**

CY-6001	
Spindle Thread	ø5 mm
Stroke	5 mm
Stroke Speed	3500 spm/min
Exhaust Type	Rear
Air Inlet	1/4" PT
Hose I.D. Size	10 mm (3/8")
Air Pressure	6.3 kg/cm <sup>2</sup> (90 psi)
Avg. Air Cons.	0.2 m <sup>3</sup> /min (7.1 CFM)
Noise Level	83 dBA
Cutting Capacity	1 mm metal plate : 500 mm/min
Saw Blade	32 teeth/inch
Handle Diameter	29 x 29 mm
Measurement	L160 x H30 mm
Net Weight	0.38 kgs (0.84 lbs)
Packing	20pcs/ctn/2cu-ft/GW:16kg


**Accessories**

**Air File & Saw**

CY-6002	
Spindle Thread	ø5 mm
Stroke	7 mm
Stroke Speed	6500 spm/min
Exhaust Type	Rear
Air Inlet	1/4" PT
Hose I.D. Size	10 mm (3/8")
Air Pressure	6.3 kg/cm <sup>2</sup> (90 psi)
Avg. Air Cons.	0.28 m <sup>3</sup> /min (9.9 CFM)
Noise Level	89 dBA
Cutting Capacity	1 mm metal plate : 900 mm/min 3 mm metal plate : 135 mm/min
Saw Blade	32 teeth/inch
Handle Diameter	39 x 37 mm
Measurement	L221 x H37 mm
Net Weight	0.75 kgs (1.65 lbs)
Packing	20pcs/ctn/2cu-ft/GW:26kg


**Accessories**

**Air File & Saw**

CY-6003	
Spindle Thread	ø5 mm
Stroke	10 mm
Stroke Speed	6000 spm/min
Exhaust Type	Rear
Air Inlet	1/4" PT
Hose I.D. Size	10 mm (3/8")
Air Pressure	6.3 kg/cm <sup>2</sup> (90 psi)
Avg. Air Cons.	0.28 m <sup>3</sup> /min (9.9 CFM)
Noise Level	89 dBA
Cutting Capacity	1 mm metal plate : 1000 mm/min 3 mm metal plate : 180 mm/min
Saw Blade	32 teeth/inch
Handle Diameter	39 x 37 mm
Measurement	L221 x H37 mm
Net Weight	0.75 kgs (1.65 lbs)
Packing	20pcs/ctn/2cu-ft/GW:26kg


**Accessories**


## Wheel Grinders

### 2" Right Angle Wheel Grinder

CY-4000A	
Throttle Type	Ring
Wheel Size	2" Dia
Tool Spindle Thread	U1/4 - 28 Female
Free Speed	15000 rpm
Exhaust Type	Side
Air Inlet	1/4" PT
Hose I. D. Size	10 mm (3/8")
Air Pressure	6.3 kg/cm <sup>2</sup> (90 psi)
Avg. Air Cons.	0.4 m <sup>3</sup> /min (14 CFM)
Sound Level	83 dBA
Vibration	< 2.5 m/sec <sup>2</sup>
Angle Head Height	46 mm (1-13/16")
Measurement	L157 x H60 mm
Net Weight	1.3 kgs (1.3 lbs)
Packing	20pcs/ctn/1.2cu-ft/GW:15kg



Excluding Grinding Wheel

### 4" Right Angle Wheel Grinder

CY-4001B	
Throttle Type	Safety Lever
Wheel Size	4" Dia
Tool Spindle Thread	M8 x P1.25 Female
Free Speed	13500 rpm
Exhaust Type	Side
Air Inlet	3/8" PT
Hose I. D. Size	10 mm (3/8")
Air Pressure	6.3 kg/cm <sup>2</sup> (90 psi)
Avg. Air Cons.	0.65 m <sup>3</sup> /min (23 CFM)
Sound Level	86 dBA
Vibration	< 2.5 m/sec <sup>2</sup>
Angle Head Height	77 mm (3-1/32")
Measurement	L260 x H95 mm
Net Weight	2.0 kgs (4.4 lbs)
Packing	6pcs/ctn/2.4cu-ft/GW:16kg



Excluding Grinding Wheel



CY-4001A

### 5" Right Angle Wheel Grinder

CY-4002B	
Throttle Type	Safety Lever
Wheel Size	5" Dia
Tool Spindle Thread	M8 x P1.25 Female
Free Speed	12000 rpm
Exhaust Type	Side
Air Inlet	3/8" PT
Hose I. D. Size	10 mm (3/8")
Air Pressure	6.3 kg/cm <sup>2</sup> (90 psi)
Avg. Air Cons.	0.65 m <sup>3</sup> /min (23 CFM)
Sound Level	88 dBA
Vibration	< 2.5 m/sec <sup>2</sup>
Angle Head Height	77 mm (3-1/32")
Measurement	L216 x H95 mm
Net Weight	2.0 kgs (4.4 lbs)
Packing	10pcs/ctn/2.4cu-ft/GW:26kg



Excluding Grinding Wheel



CY-4002A

### 7" Right Angle Wheel Grinder

CY-4004B	
Throttle Type	Safety Lever
Wheel Size	7" Dia
Tool Spindle Thread	U5/8 - 11 Female
Free Speed	7000 rpm
Exhaust Type	Side
Air Inlet	3/8" PT
Hose I. D. Size	12.7 mm (1/2")
Air Pressure	6.3 kg/cm <sup>2</sup> (90 psi)
Avg. Air Cons.	1.1 m <sup>3</sup> /min (38.8 CFM)
Sound Level	88 dBA
Vibration	< 2.5 m/sec <sup>2</sup>
Angle Head Height	107 mm (4-7/32")
Measurement	L353 x H130 mm
Net Weight	3.0 kgs (6.6 lbs)
Packing	6pcs/ctn/2.4cu-ft/GW:23kg



Excluding Grinding Wheel



CY-4004A

### 7" Right Angle Wheel Grinder

CY-4005B	
Throttle Type	Safety Lever
Wheel Size	7" Dia
Tool Spindle Thread	W1/2 - 16 Female
Free Speed	7000 rpm
Exhaust Type	Side
Air Inlet	3/8" PT
Hose I. D. Size	12.7 mm (1/2")
Air Pressure	6.3 kg/cm <sup>2</sup> (90 psi)
Avg. Air Cons.	1.1 m <sup>3</sup> /min (38.8 CFM)
Sound Level	89 dBA
Vibration	< 2.5 m/sec <sup>2</sup>
Angle Head Height	89 mm (3-1/2")
Measurement	L353 x H105 mm
Net Weight	3.0 kgs (6.6 lbs)
Packing	6pcs/ctn/2.4cu-ft/GW:23kg



Excluding Grinding Wheel



CY-4005A

### 4" Right Angle Wheel Grinder

CY-4006B	
Throttle Type	Safety Lever
Wheel Size	4" Dia
Tool Spindle Thread	3/8" - 24 Male or M10 x 1.5
Free Speed	12000 rpm
Exhaust Type	Side
Air Inlet	1/4" PT
Hose I. D. Size	10 mm (3/8")
Air Pressure	6.3 kg/cm <sup>2</sup> (90 psi)
Avg. Air Cons.	0.17 m <sup>3</sup> /min (6 CFM)
Sound Level	80 dBA
Vibration	< 2.5 m/sec <sup>2</sup>
Angle Head Height	74 mm ( 2-7/8" )
Measurement	L242 x H90 mm
Net Weight	1.9 kgs (4.18 lbs)
Packing	12pcs/ctn/2.9cu-ft/GW:24kg



Excluding Grinding Wheel



CY-4006A

### 7" Right Angle Wheel Grinder

CY-4007B	
Throttle Type	Lever
Wheel Size	7" Dia
Tool Spindle Thread	5/8" - 11 Male or M14
Free Speed	7000 rpm
Exhaust Type	Side
Air Inlet	3/8" PT
Hose I. D. Size	11 mm (3/8")
Air Pressure	6.3 kg/cm <sup>2</sup> (90 psi)
Avg. Air Cons.	0.5 m <sup>3</sup> /min (17.5 CFM)
Sound Level	93 dBA
Vibration	< 3.2 m/sec <sup>2</sup>
Angle Head Height	91 mm ( 3-5/8" )
Measurement	L331 x H120 mm
Net Weight	3.05 kgs (6.71 lbs)
Packing	6pcs/ctn/2cu-ft/GW:25kg



Excluding Grinding Wheel



CY-4007A

### 9" Vertical Wheel Grinder

CY-4008B	
Throttle Type	Safety Lever
Wheel Size	9"
Tool Spindle Thread	5/8" - 11 Male
Free Speed	6000 rpm
Exhaust Type	Side
Air Inlet	1/2" PT
Hose I.D. Size	13 mm
Air Pressure	6.3 kg/cm <sup>2</sup> (90 psi)
Avg. Air Cons.	0.46 m <sup>3</sup> /min (16.1 CFM)
Sound Level	83 dBA
Vibration	3.3 m/sec <sup>2</sup>
Measurement	L253 x H178 mm
Net Weight	4.4 kgs (9.68 lbs)
Packing	4pcs/ctn/2.9cu-ft/GW:24.5kg



Excluding Grinding Wheel

## Mini Grinders

### 3" Mini Wheel Grinder

CY-4030A	
Throttle Type	Safety Lever
Wheel Size	75 mm (3")
Spindle Thread	U1/4 - 28 Female
Free Speed	18000 rpm
Exhaust Type	Rear
Air Inlet	1/4" PT
Hose I. D. Size	10 mm (3/8")
Air Pressure	6.3 kg/cm <sup>2</sup> (90 psi)
Avg. Air Cons.	0.09 m <sup>3</sup> /min (3 CFM)
Sound Level	84 dBA
Vibration	< 2.5 m/sec <sup>2</sup>
Measurement	L230 x H110 x W90 mm
Net Weight	1.10 kgs (2.42 lbs)
Packing	20pcs/ctn/1.2cu-ft/GW:15kg



### 2" Mini Wheel Grinder

CY-4031A	
Throttle Type	Safety Lever
Wheel Size	50 mm (2")
Spindle Thread	U1/4 - 28 Female
Free Speed	25000 rpm
Exhaust Type	Rear
Air Inlet	1/4" PT
Hose I. D. Size	10 mm (3/8")
Air Pressure	6.3 kg/cm <sup>2</sup> (90 psi)
Avg. Air Cons.	0.06 m <sup>3</sup> /min (2 CFM)
Sound Level	78 dBA
Vibration	< 2.5 m/sec <sup>2</sup>
Measurement	L200 x H80 x W71 mm
Net Weight	0.75 kgs (1.65 lbs)
Packing	10pcs/ctn/1.4cu-ft/GW:9kg



## Die Grinders

### Die Grinder

CY-4301B	
Throttle Type	Safety Lever
Collet size	3 mm or 1/8"
Capacity Grinding Wheel	13 mm (1/2")
Free Speed	30000 rpm
Exhaust Type	Front
Air Inlet	1/4" PT
Hose I.D. Size	6.3 mm (1/4")
Air Pressure	6.3 kg/cm <sup>2</sup> (90 psi)
Avg. Air Cons.	0.25 m <sup>3</sup> /min (8.8 CFM)
Sound Level	82 dBA
Vibration	< 2.5 m/sec <sup>2</sup>
Measurement	L150 x H31 mm
Net Weight	0.48 kgs (1.06 lbs)
Packing	20pcs/ctn/1.2cu-ft/GW:13kg



CY-4301A



### Die Grinder

CY-4302A	
Throttle Type	Ring
Collet size	6 mm or 1/4"
Capacity Grinding Wheel	25 mm (1")
Free Speed	24000 rpm
Exhaust Type	Front
Air Inlet	1/4" PT
Hose I.D. Size	10 mm (3/8")
Air Pressure	6.3 kg/cm <sup>2</sup> (90 psi)
Avg. Air Cons.	0.4 m <sup>3</sup> /min (14.1 CFM)
Sound Level	81 dBA
Vibration	< 2.5 m/sec <sup>2</sup>
Measurement	L170 x H35 mm
Net Weight	0.6 kgs (1.32 lbs)
Packing	20pcs/ctn/1.2cu-ft/GW:16kg



### Die Grinder

CY-4303A	
Throttle Type	Ring
Collet size	6 mm or 1/4"
Capacity Grinding Wheel	25 mm (1")
Free Speed	24000 rpm
Exhaust Type	Front
Air Inlet	1/4" PT
Hose I.D. Size	10 mm (3/8")
Air Pressure	6.3 kg/cm <sup>2</sup> (90 psi)
Avg. Air Cons.	0.4 m <sup>3</sup> /min (14.1 CFM)
Sound Level	81 dBA
Vibration	< 2.5 m/sec <sup>2</sup>
Measurement	L298 x H35 mm
Net Weight	0.9 kgs (1.98 lbs)
Packing	12pcs/ctn/1.5cu-ft/GW:13kg



### Die Grinder

CY-4304C	
Throttle Type	Lever
Collet size	6 mm or 1/4"
Capacity Grinding Wheel	25 mm (1")
Free Speed	22000 rpm
Exhaust Type	Front
Air Inlet	1/4" PT
Hose I.D. Size	10 mm (3/8")
Air Pressure	6.3 kg/cm <sup>2</sup> (90 psi)
Avg. Air Cons.	0.45 m <sup>3</sup> /min (15.9 CFM)
Sound Level	82 dBA
Vibration	< 2.5 m/sec <sup>2</sup>
Measurement	L172 x H35 mm
Net Weight	0.6 kgs (1.32 lbs)
Packing	20pcs/ctn/1.2cu-ft/GW:16kg



CY-4304A



### Die Grinder

CY-4305B	
Throttle Type	Safety Lever
Collet size	6 mm or 1/4"
Capacity Grinding Wheel	32 mm (1-1/4")
Free Speed	18000 rpm
Exhaust Type	Front
Air Inlet	1/4" PT
Hose I.D. Size	8.0 mm (5/16")
Air Pressure	6.3 kg/cm <sup>2</sup> (90 psi)
Avg. Air Cons.	0.43 m <sup>3</sup> /min (15.2 CFM)
Sound Level	83 dBA
Vibration	< 2.5 m/sec <sup>2</sup>
Measurement	L180 x H40 mm
Net Weight	0.88 kgs (1.94 lbs)
Packing	20pcs/ctn/1.2cu-ft/GW:18kg



### Die Grinder

CY-4306A	
Throttle Type	Ring
Collet size	6 mm or 1/4"
Capacity Grinding Wheel	32 mm (1-1/4")
Free Speed	16000 rpm
Exhaust Type	Front
Air Inlet	3/8" PT
Hose I.D. Size	10 mm (3/8")
Air Pressure	6.3 kg/cm <sup>2</sup> (90 psi)
Avg. Air Cons.	0.5 m <sup>3</sup> /min (17.7 CFM)
Sound Level	84 dBA
Vibration	< 2.5 m/sec <sup>2</sup>
Measurement	L305 x H45 mm
Net Weight	1.3 kgs (2.86 lbs)
Packing	12pcs/ctn/1.5cu-ft/GW:20kg



## Die Grinders

### Die Grinder

CY-43A2A	
Throttle Type	Ring
Collet size	3 mm, 6 mm, 1/4" or 1/8"
Free Speed	4000 rpm
Exhaust Type	Rear
Air Inlet	1/4" PT
Hose I.D. Size	10 mm (3/8")
Air Pressure	6.3 kg/cm <sup>2</sup> (90 psi)
Avg. Air Cons.	0.35 m <sup>3</sup> /min (12.4 CFM)
Sound Level	83 dBA
Vibration	< 2.5 m/sec <sup>2</sup>
Measurement	L145 mm
Net Weight	0.75 kgs (1.65 lbs)
Packing	10pcs/ctn/1.3cu-ft/GW:10kg



CY-43A2C

### Die Grinder

CY-43A3	
Throttle Type	Safety Lever
Collet size	3 mm, 6 mm, 1/4" or 1/8"
Free Speed	22000 rpm
Exhaust Type	Rear
Air Inlet	1/4" PT
Hose I.D. Size	10 mm (3/8")
Air Pressure	6.3 kg/cm <sup>2</sup> (90 psi)
Avg. Air Cons.	0.35 m <sup>3</sup> /min (12.4 CFM)
Vibration	< 2.5 m/sec <sup>2</sup>
Measurement	L175 mm
Net Weight	0.6 kgs (1.32 lbs)
Packing	20pcs/ctn/0.5cu-ft/GW:15kg



Other type: Free Speed : 27000 rpm **CY-43A1**

### Die Grinder

CY-43B1	
Throttle Type	Lever
Collet size	3 mm and 6 mm
Free Speed	25000 rpm
Exhaust Type	Rear
Air Inlet	1/4" PT
Hose I.D. Size	10 mm (3/8")
Air Pressure	6.3 kg/cm <sup>2</sup> (90 psi)
Vibration	< 2.5 m/sec <sup>2</sup>
Measurement	L230 mm
Net Weight	0.52 kgs (1.14 lbs)
Packing	35pcs/ctn/2.19cu-ft/GW:25.15kg



## Mini Angle Die Grinders

### Mini Right Angle Die Grinder

CY-4200	
Collet size	1/4", 1/8", 6 mm or 3 mm
Free Speed	18000 rpm
Exhaust Type	Rear
Air Inlet	1/4" PT
Hose I.D. Size	10 mm (3/8")
Air Pressure	6.3 kg/cm <sup>2</sup> (90 psi)
Avg. Air Cons.	0.43 m <sup>3</sup> /min (15 CFM)
Sound Level	86 dBA
Vibration	< 2.5 m/sec <sup>2</sup>
Measurement	L158 x 77 mm
Net Weight	0.46 kgs (1.0 lbs)
Packing	25pcs/ctn/0.76cu-ft/GW:16kg



### Mini 120° Angle Die Grinder

CY-4201	
Collet size	6 mm or 1/4"
Free Speed	25000 rpm
Exhaust Type	Rear
Air Inlet	1/4" PT
Hose I.D. Size	10 mm (3/8")
Air Pressure	90 psi
Avg. Air Cons.	1 CFM
Sound Level	86 dBA
Vibration	< 2.5 m/sec <sup>2</sup>
Measurement	L170 mm
Net Weight	0.5 kgs (1.1 lbs)
Packing	20pcs/ctn/1.0cu-ft/GW:13kg



### Mini 120° Angle Die Grinder

CY-4203	
Collet size	6 mm or 1/4"
Free Speed	25000 rpm
Exhaust Type	Rear
Air Inlet	1/4" PT
Hose I.D. Size	10 mm (3/8")
Air Pressure	6.3 kg/cm <sup>2</sup> (90 psi)
Avg. Air Cons.	0.06 m <sup>3</sup> /min (2 CFM)
Sound Level	84 dBA
Vibration	< 2.5 m/sec <sup>2</sup>
Measurement	L170 mm
Net Weight	0.71 kgs (1.56 lbs)
Packing	20pcs/ctn/1.2cu-ft/GW:16kg



### Mini 120° Angle Die Grinder

CY-4204	
Collet size	6 mm or 1/4"
Free Speed	18000 rpm
Exhaust Type	Rear
Air Inlet	1/4" PT
Hose I.D. Size	10 mm (3/8")
Air Pressure	90 psi
Avg. Air Cons.	3 CFM
Sound Level	87 dBA
Vibration	< 2.5 m/sec <sup>2</sup>
Measurement	L200 mm
Net Weight	0.82 kgs (1.84 lbs)
Packing	20pcs/ctn/1.2cu-ft/GW:18kg



### Mini Right Angle Die Grinder

CY-4205	
Collet size	1/4", 1/8", 6 mm or 3 mm
Free Speed	22000 rpm
Exhaust Type	Rear
Air Inlet	1/4" PT
Hose I.D. Size	10 mm (3/8")
Air Pressure	6.3 kg/cm <sup>2</sup> (90 psi)
Avg. Air Cons.	0.43 m <sup>3</sup> /min (15 CFM)
Sound Level	87 dBA
Vibration	< 2.5 m/sec <sup>2</sup>
Measurement	L124 mm
Net Weight	0.45 kgs (0.99 lbs)
Packing	25pcs/ctn/0.76cu-ft/GW:16kg



Other type: Free Speed : 15000 rpm **CY-42051**

## Micro Die Grinders

### Micro Die Grinder

CY-4400A	
Collet size	3 mm and 6 mm
Free Speed	35000 rpm
Exhaust Type	Rear
Air Inlet	1/4" Male
Hose I.D. Size	6 mm
Air Pressure	6.3 kg/cm <sup>2</sup> (90 psi)
Avg. Air Cons.	0.25 m <sup>3</sup> /min
Vibration	< 2.5 m/sec <sup>2</sup>
Measurement	L175 mm
Net Weight	0.35 kgs (0.77 lbs)
Packing	20pcs/ctn/0.9cu-ft/GW:11kg



Other type: Collet Size : 2.4 mm **CY-4400B**

### Micro Die Grinder

CY-4401A	
Collet size	3 mm , 1/8" or 3/32"
Free Speed	70000 rpm
Exhaust Type	Rear
Air Inlet	1/4"
Hose I.D. Size	6 mm (1/4")
Air Pressure	6.3 kg/cm <sup>2</sup> (90 psi)
Avg. Air Cons.	0.15 m <sup>3</sup> /min (5.3 CFM)
Sound Level	81 dBA
Vibration	< 2.5 m/sec <sup>2</sup>
Measurement	L135 mm
Net Weight	0.22 kgs (0.48 lbs)
Packing	20pcs/ctn/1.14cu-ft/GW:7kg



### Micro Die Grinder Kit

CY-4401K	
Collet size	3 mm , 1/8" or 3/32"
Free Speed	70000 rpm
Exhaust Type	Rear
Air Inlet	1/4"
Hose I.D. Size	6 mm
Air Pressure	6.3 kg/cm <sup>2</sup> (90 psi)
Avg. Air Cons.	0.15 m <sup>3</sup> /min (5.3 CFM)
Sound Level	81 dBA
Vibration	< 2.5 m/sec <sup>2</sup>
Measurement	L135 mm
Net Weight	0.22 kgs (0.48 lbs)
Packing	10pcs/ctn/1.37cu-ft/GW:8kg



### Micro Die Grinder

CY-4402A	
Collet size	3 mm
Free Speed	65000 rpm
Exhaust Type	Rear
Hose I.D. Size	6.5 mm (1/4")
Air Pressure	6.3 kg/cm <sup>2</sup> (90 psi)
Vibration	< 2.5 m/sec <sup>2</sup>
Measurement	L165 mm
Net Weight	0.13 kgs (0.29 lbs)
Packing	32pcs/ctn/1.3cu-ft/GW:19kg



Other type: Collet Size : 2.4 mm **CY-4402B**

### Micro Die Grinder

CY-4403A	
Collet size	3 mm
Free Speed	65000 rpm
Exhaust Type	Rear
Hose I.D. Size	6.5 mm (1/4")
Air Pressure	6.3 kg/cm <sup>2</sup> (90 psi)
Vibration	< 2.5 m/sec <sup>2</sup>
Measurement	L185 mm
Net Weight	0.14 kgs (0.31 lbs)
Packing	32pcs/ctn/1.3cu-ft/GW:19kg



Other type: Collet Size : 2.4 mm **CY-4403B**

### Micro Die Grinder

CY-4404A	
Collet size	3 mm
Free Speed	65000 rpm
Exhaust Type	Rear
Hose I.D. Size	6.5 mm (1/4")
Air Pressure	6.3 kg/cm <sup>2</sup> (90 psi)
Vibration	< 2.5 m/sec <sup>2</sup>
Measurement	L140 mm
Net Weight	0.21 kgs (0.46 lbs)
Packing	32pcs/ctn/1.3cu-ft/GW:19kg



Other type: Collet Size : 2.4 mm **CY-4404B**

### Right Angle Micro Die Grinder

CY-4260A	
Collet size	3 mm
Free Speed	23500 rpm
Exhaust Type	Rear
Hose I.D. Size	6.5 mm (1/4")
Air Pressure	6.3 kg/cm <sup>2</sup> (90 psi)
Vibration	< 2.5 m/sec <sup>2</sup>
Measurement	L137 x H40.7 mm
Net Weight	0.14 kgs (0.31 lbs)
Packing	32pcs/ctn/1.4cu-ft/GW:19kg



### 120° Angle Micro Die Grinder

CY-4280	
Collet size	3 mm
Free Speed	52500 rpm
Exhaust Type	Rear
Hose I.D. Size	6.5 mm (1/4")
Air Pressure	6.3 kg/cm <sup>2</sup> (90 psi)
Vibration	< 2.5 m/sec <sup>2</sup>
Measurement	L142 x H60 mm
Net Weight	0.13 kgs (0.3 lbs)
Packing	32pcs/ctn/1.4cu-ft/GW:19kg





## 90° Micro Angle Grinder

CY-4061A	
Throttle Type	Ring
Wheel Size	30 mm
Spindle Thread	M7 x 0.75 (Male)
Free Speed	23500 rpm
Exhaust Type	Rear
Hose I.D. Size	6.5 mm (1/4")
Air Pressure	6.3 kg/cm <sup>2</sup> (90 psi)
Vibration	< 2.5 m/sec <sup>2</sup>
Measurement	L140 x H43 mm
Net Weight	0.15 kgs (0.33 lbs)
Packing	32pcs/ctn/1.9cu-ft/ GW:14kg



## 120° Micro Angle Grinder

CY-4090	
Throttle Type	Ring
Wheel Size	30 mm
Spindle Thread	M7 x 0.75 (Male)
Free Speed	23000 rpm
Exhaust Type	Rear
Hose I.D. Size	6.5 mm (1/4")
Air Pressure	6.3 kg/cm <sup>2</sup> (90 psi)
Avg. Air Cons.	0.20 m <sup>3</sup> /min (7.06 CFM)
Vibration	< 2.5 m/sec <sup>2</sup>
Measurement	L160 mm
Net Weight	0.3 kgs (0.66 lbs)
Packing	20pcs/ctn/0.9cu-ft/GW:11kg



## 120° Micro Angle Grinder

CY-4091	
Throttle Type	Ring
Wheel Size	30 mm
Spindle Thread	M7 x 0.75 (Male)
Free Speed	23500 rpm
Exhaust Type	Rear
Hose I.D. Size	6.5 mm (1/4")
Air Pressure	6.3 kg/cm <sup>2</sup> (90 psi)
Vibration	< 2.5 m/sec <sup>2</sup>
Measurement	L128 x H50 mm
Net Weight	0.17 kgs (0.37 lbs)
Packing	32pcs/ctn/1.9cu-ft/ GW:14kg



## 120° Micro Angle Grinder

CY-4093	
Throttle Type	Ring
Wheel Size	20 mm
Spindle Thread	M7 x 0.75 (Male)
Free Speed	35000 rpm
Exhaust Type	Rear
Hose I.D. Size	6.5 mm (1/4")
Air Pressure	6.3 kg/cm <sup>2</sup> (90 psi)
Vibration	< 2.5 m/sec <sup>2</sup>
Measurement	L147 x H54 mm
Net Weight	0.15 kgs (0.33 lbs)
Packing	32pcs/ctn/1.9cu-ft/GW:14kg



**In-Line Non Reversible Drill**

CY-6800B	
Chuck Size	10 mm (3/8")
Tool Spindle Thread	3/8" - 24 Male
Free Speed	4000 rpm
Exhaust Type	Rear
Air Inlet	1/4" PT
Hose I. D. Size	10 mm (3/8")
Air Pressure	6.3 kg/cm <sup>2</sup> (90 psi)
Avg. Air Cons.	0.3 m <sup>3</sup> /min (10.5 CFM)
Noise Level	83 dBA
Vibration	< 2.5 m/sec <sup>2</sup>
Measurement	L230 mm
Net Weight	0.8 kgs (1.98 lbs)
Packing	20pcs/ctn/0.6cu-ft/GW:16kg



CY-6800B



CY-6801B



Both of them could be attached with pinwheel shaped sanding papers.

Application : (CY-6800)  
Furniture, Irregularity Surface

Other type: Collet Size : 6 mm **CY-6801B**

**3/8" Pistol Grip Non Reversible Drill**

CY-6830	
Chuck Size	10 mm (3/8")
Tool Spindle Thread	3/8" - 24 Male
Free Speed	2000 rpm
Exhaust Type	Handle
Air Inlet	1/4" PT
Hose I. D. Size	10 mm (3/8")
Air Pressure	6.3 kg/cm <sup>2</sup> (90 psi)
Avg. Air Cons.	0.28 m <sup>3</sup> /min (10 CFM)
Noise Level	83 dBA
Vibration	< 2.5 m/sec <sup>2</sup>
Measurement	L185 x H159 mm
Net Weight	1.06 kgs (2.34 lbs)
Packing	10pcs/ctn/0.7cu-ft/GW:13kg


**3/8" Pistol Grip Reversible Drill**

CY-6831	
Chuck Size	10 mm (3/8")
Tool Spindle Thread	3/8" - 24 Male
Free Speed	1800 rpm
Exhaust Type	Handle
Air Inlet	1/4" PT
Hose I. D. Size	10 mm (3/8")
Air Pressure	6.3 kg/cm <sup>2</sup> (90 psi)
Avg. Air Cons.	0.28 m <sup>3</sup> /min (10 CFM)
Noise Level	83 dBA
Vibration	< 2.5 m/sec <sup>2</sup>
Measurement	L187 x H160 mm
Net Weight	1.09 kgs (2.4 lbs)
Packing	10pcs/ctn/0.7cu-ft/GW:13kg


**1/2" Pistol Grip Non Reversible Drill**

CY-6832	
Chuck Size	13 mm (1/2")
Tool Spindle Thread	3/8" - 24 Male
Free Speed	800 rpm
Exhaust Type	Handle
Air Inlet	1/4" PT
Hose I. D. Size	10 mm (3/8")
Air Pressure	6.3 kg/cm <sup>2</sup> (90 psi)
Avg. Air Cons.	0.28 m <sup>3</sup> /min (10 CFM)
Noise Level	83 dBA
Vibration	< 2.5 m/sec <sup>2</sup>
Measurement	L215 x H166 mm
Net Weight	1.46 kgs (3.22 lbs)
Packing	20pcs/ctn/0.98cu-ft/GW:17kg


**1/2" Pistol Grip Reversible Drill**

CY-6833	
Chuck Size	13 mm (1/2")
Tool Spindle Thread	3/8" - 24 Male
Free Speed	750 rpm
Exhaust Type	Handle
Air Inlet	1/4" PT
Hose I. D. Size	10 mm (3/8")
Air Pressure	6.3 kg/cm <sup>2</sup> (90 psi)
Avg. Air Cons.	0.28 m <sup>3</sup> /min (10 CFM)
Noise Level	83 dBA
Vibration	< 2.5 m/sec <sup>2</sup>
Measurement	L216 x H169 mm
Net Weight	1.47 kgs (3.24 lbs)
Packing	20pcs/ctn/0.98cu-ft/GW:17kg


**Pistol Grip Sander**

CY-2590A	
Pad Size	3", 4-1/2", 5"
Spindle Thread	M11 X 1.25 Male
Orbit Diameter	3 mm (3/32")
Free Speed	16000 rpm
Exhaust Type	Front
Air Inlet	1/4" PT
Hose I.D. Size	6.5 mm (1/4")
Air Pressure	6.3 kg/cm <sup>2</sup> (90 psi)
Avg. Air Cons.	0.35 m <sup>3</sup> /min (12.25 CFM)
Sound Level	81 dBA
Vibration	1.2 m/sec <sup>2</sup>
HP(W)	0.2 (150)
Measurement	L140 x H160 mm
Net Weight	1.2 Kgs (2.64 lbs)
Packing	20pcs/ctn/1.24cu-ft/GW:20kg



Excluding Wheel

**Smart Eraser**

CY-6700A	
Spindle Thread	5/16" - 24 Female
Free Speed	2500 rpm
Exhaust Type	Rear
Air Inlet	1/4" PT
Hose I.D. Size	6.5 mm (1/4")
Air Pressure	6.3 kg/cm <sup>2</sup> (90 psi)
Avg. Air Cons.	0.3 m <sup>3</sup> /min (10.5 CFM)
Noise Level	83 dBA
Vibration	< 2.5 m/sec <sup>2</sup>
Measurement	L216 mm
Net Weight	0.8 kgs (1.98 lbs)



The adhesive - off wheel and the handle are excluded.

Other type: Spindle Thread : M8 x P1.25 **CY-6700B**

### Automatic Professional Vacuum Cleaner

<b>CY-9621</b>	
Consumption Power	1100 W
Max Vacuum	2200 mm H <sub>2</sub> O
Air Flow	2.6 m <sup>3</sup> /min
Drum Capacity	24 L
Drum Material	Stainless
Measurement	L562 x W500 x H810 mm
Weight	23.65 kgs
Packing	1pc/ctn/8.03cu-ft/GW:24.9kg
<b>Accessory</b>	
• Automatic unit for Pneumatic tools-B	
• 2 in 1 Hose for Pneumatic tools-B	
• Air gun	
• Paper bag (520 x 300 mm)	
• Cloth Filter    • Paper Filter	



### Automatic Professional Vacuum Cleaner

<b>CY-9513</b>	
Consumption Power	1100 W
Max Vacuum	2200 mm H <sub>2</sub> O
Air Flow	2.6 m <sup>3</sup> /min
Drum Capacity	24 L
Drum Material	Stainless
Measurement	L380 x W380 x H700 mm
Weight	12.5 kgs
Packing	1pc/ctn/8.03cu-ft/GW:24.9kg
<b>Accessory</b>	
• Automatic unit for Pneumatic tools-B	
• 2 in 1 Hose for Pneumatic tools-B	
• Paper bag (520 x 300 mm)	
• Cloth Filter    • Paper Filter	

\*Pneumatic tools are not included.



Other type: Drum Capacity : 18 L **CY-9511**  
 Drum Capacity : 40 L **CY-9515**

### Automatic Professional Vacuum Cleaner

<b>CY-9502</b>	
Consumption Power	2200 W
Max Vacuum	2700 mm H <sub>2</sub> O
Air Flow	5.6 m <sup>3</sup> /min
Drum Capacity	80 L
Drum Material	Stainless
Measurement	L595 x W575 x H935 mm
Weight	36.75 kgs
Packing	1pc/ctn/11.3cu-ft/GW:40.18kg
<b>Accessory</b>	
• Basket	
• Y-Join Set	
• Automatic unit for Pneumatic tools-A	
• 2 in 1 Hose for Pneumatic tools-A x 2 pcs	
• Cloth Filter    • Paper Filter	

\*Pneumatic tools are not included.



### Automatic Professional Vacuum Cleaner

<b>CY-9631</b>	
Consumption Power	1100 W
Max Vacuum	2200 mm H <sub>2</sub> O
Air Flow	2.6 m <sup>3</sup> /min
Drum Capacity	48 L
Drum Material	Stainless
Measurement	L778 x W550 x H946 mm
Weight	40 kgs
Packing	1pc/ctn/14.29cu-ft/GW:38.3kg
<b>Accessory</b>	
• Hook	
• Automatic unit for Pneumatic tools-B	
• 2 in 1 Hose for Pneumatic tools-B	
• Paper bag (830 x 350 mm)	
• Cloth Filter    • Paper Filter	



### Wet/Dry Vacuum Cleaner

<b>CY-9541</b>	
Voltage	110 V ~ 120 V/220 V ~ 240 V
Consumption Power	1050 W ~ 1250 W/1150 W ~ 1350 W
Max. Vacuum	2450 mm H <sub>2</sub> O
Air Flow	2.9 m <sup>3</sup> /min
Drum Capacity	38 L
Drum Material	ABS
Measurement	L790 x W545 x H590 mm
Weight	16.8 kgs
Packing	1pc/ctn/9.09cu-ft/G.W.:20.4kg

#### Accessory


- ① 2 in 1 Hose for Pneumatic tools (5M) x 1 pc
- ② 124 Dust Bag (830 x 350 mm) x 1 pc
- ③ Paper Filter (for dry/ 225\*190\*50mm) \*1pc
- ④ Paper Filter (for dry/ M dust class) \*1pc(Optional)
- ⑤ Hose hook\*1set (Option)
- ⑥ Air Filter Regulator Set (6kg/cm<sup>2</sup>)\*1set (Option)
- ⑦ Tool Rack set x 1 set (Option)





**BACKING: F.R.P. (5" & 6")**


No.	Part No.	Size (mm)	Thread Size	The Back of Pad	The Face of Pad	Thickness (mm)	Shape	Weight (g)
1	00-55501	Ø125(5")	5/16"-24	FRP	Vinyl	9	○	100g±5g
	00-55502				Hook	10		
2	00-55551	Ø125(5")	5/16"-24	FRP	Vinyl	9	○	100g±5g
	00-55552				Hook	10		
3	00-55561	Ø125(5")	5/16"-24	FRP	Vinyl	9	○	100g±5g
	00-55562				Hook	10		
4	00-56501	Ø150(6")	5/16"-24	FRP	Vinyl	8	○	120g±5g
	00-56502				Hook	9		
5	00-56561	Ø150(6")	5/16"-24	FRP	Vinyl	8	○	120g±5g
	00-56562				Hook	9		
6	00-565A2-07	Ø150(6")	5/16"-24	FRP	Hook	13	○	120g±5g
7	00-565A2-14	Ø150(6")	5/16"-24	FRP	Hook	13	○	120g±5g
8	00-555B2	Ø125(5")	5/16"-24	FRP	Hook	12	○	100g±5g
9	00-565B2	Ø150(6")	5/16"-24	FRP	Hook	11	○	130g±5g

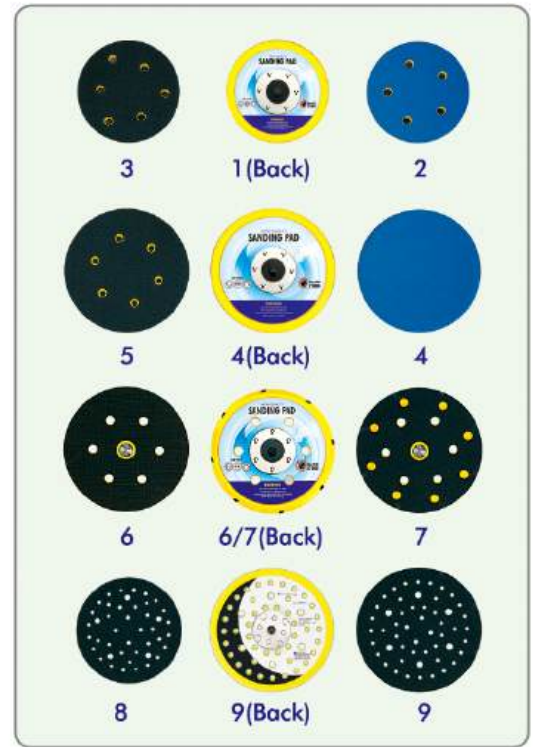

※ Actual specification and color are based on the real product.

**BACKING: F.R.P. (Other Sizes) CIRCLE TYPE**


No.	Part No.	Size (mm)	The Back of Pad	Thread Size	Thread	The Face of Pad	Thickness (mm)	Weight (g)
1	00-5F2061	Ø50 (2")	FRP	M6 x P1.0	Male	Vinyl	10	22
	00-5F2062					Hook		
	00-5F2051			5/16" - 24	Male	Vinyl	10	22
	00-5F2052					Hook		
	00-5F2041			1/4" - 20	Male	Vinyl	10	22
	00-5F2042					Hook		
2	00-5F3161	Ø75 (3")	FRP	M6 x P1.0	Male	Vinyl	11	28
	00-5F3162					Hook		
	00-5F3151			5/16" - 24	Male	Vinyl	11	28
	00-5F3152					Hook		
	00-5F3141			1/4" - 20	Male	Vinyl	11	28
	00-5F3142					Hook		
3	00-5F3051	Ø75 (3")	FRP	5/16" - 24	Male	Vinyl	13	80
	00-5F3052					Hook		
4	00-5F3A51	Ø3 1/2"	FRP	5/16" - 24	Male	Vinyl	16	80
	00-5F3A52					Hook		
5	00-5F4051	Ø100 (4")	FRP	5/16" - 24	Male	Vinyl	15	90
	00-5F4052					Hook		
6	00-5F3342	Ø75(3")	FRP	1/4"-20	Male	Hook	11	30

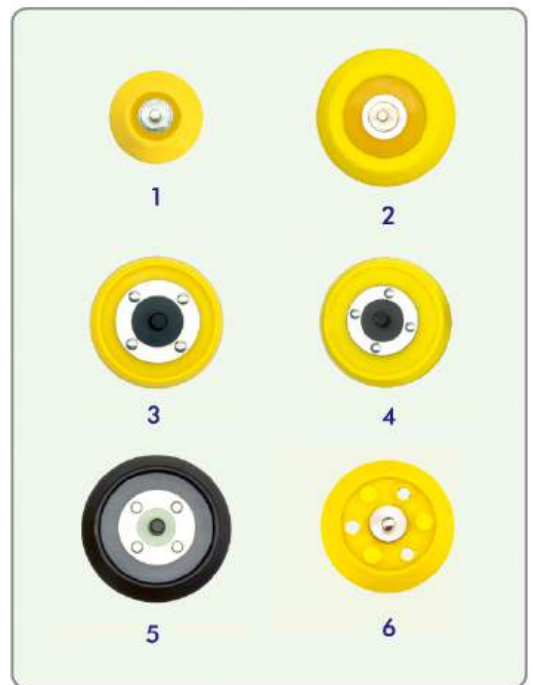

※ Actual specification and color are based on the real product.

## ▶ BACKING: F.R.P. (Other Sizes) SQUARE TYPE

No.	Part No.	Size (mm)	The Back of Pad	The Face of Pad	Tickness (mm)	Application Model	Weight (g)
1	207N-88M	L93 x W176	FRP	Vinyl	10	CY-207N	85
2	207N-88L			Hook	10		85
3	207D-88M			Vinyl	10	CY-207D CY-207V	85
4	207D-88L			Hook	10		85
5	A3813Z-88M	L108 x W96	FRP	Vinyl	12	CY-3813Z	80
6	A3813Z-88L			Hook	12		80

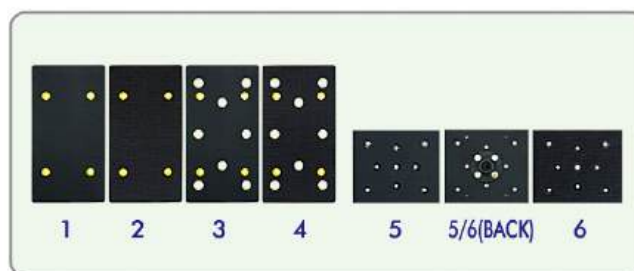

## ▶ BACKING: F.R.P. (Other Sizes) SQUARE TYPE

No.	Part No.	Size (mm)	The Back of Pad	The Face of Pad	Shape
1	2080N-88L	75 x 100 (3" x 4")	NYLON	Hook	
2	2080D-88L				
3	2090N-47L	93 x 178 (3-2/3" x 7")			
4	2090D-47L				
5	2100N-47L	70 x 198 (3" x 8")			
6	2100D-47L				



## ▶ BACKING: Aluminum Plate - 1


No.	Part No.	Size (mm)	The Back of Pad	The Face of Pad	Application Model	Shape
1	A302N-29M	74 x 145 (3"x6")	Aluminum	Vinyl	CY-302N	
	A302N-29L			Hook	CY-312N	
2	A302D-29M	74 x 145 (3"x6")	Aluminum	Vinyl	CY-302D	
	A302D-29L			Hook	CY-312D	
3	A204D-17M	93 x 176 (3-1/2"x7")	Aluminum	Vinyl	CY-204D	
	A204D-17L			Hook		
4	A205D-17M	112 x 220 (4-1/2"x8-1/2")	Aluminum	Vinyl	CY-205D	
	A205D-17L			Hook		
5	A206D-35L	Ø148	Aluminum	Hook	CY-206D	
6	A3400N-88L	L109 x W97	Aluminum	Hook	CY-3400 Series	
	A3400N-88M			Vinyl		



※ Actual specification and color are based on the real product.

## ▶ BACKING: Aluminum Plate - 2


No.	Part No.	Size (mm)	The Back of Pad	Thread Size	Female Thread	The Face of Pad	Thickness (mm)	Weight (g)
1	00-5A1061	Ø25 (1")	Aluminum	M6 x P1.0	No	Vinyl	10	8
	00-5A1062			Hook				
	00-5A1041				1/4" - 20	No	Vinyl	10
	00-5A1042			Hook				
2	00-5A1A61	Ø30			M6 x P1.0	No	Vinyl	10
	00-5A1A62			Hook				
	00-5A1A41				1/4" - 20	No	Vinyl	10
	00-5A1A42			Hook				
3	00-5A2061	Ø50 (2")	M6 x P1.0		Yes	Vinyl	10	20
	00-5A2062		Hook					
	00-5A2051			5/16" - 24	No	Vinyl	10	20
	00-5A2052		Hook					
	00-5A2041			1/4" - 20	Yes	Vinyl	10	20
	00-5A2042		Hook					
	00-5A2001			M6	No	Vinyl	10	20
	00-5A2002		Hook					
	00-5A2011			1/4"	No	Vinyl	10	20
	00-5A2012		Hook					
4	00-5A2151	Ø50 (2")		5/16" - 24	Yes	Vinyl	10	17
	00-5A2152		Hook					
5	00-5A3161	Ø75 (3")		M6 x P1.0	Yes	Vinyl	11	25
	00-5A3162		Hook					
	00-5A3151			5/16" - 24	No	Vinyl	11	25
	00-5A3152		Hook					
	00-5A3141			1/4" - 20	Yes	Vinyl	11	25
	00-5A3142		Hook					
	00-5A3101			M6	No	Vinyl	11	25
	00-5A3102		Hook					
	00-5A3111			1/4"	No	Vinyl	11	25
	00-5A3112		Hook					
6	00-5A3251	Ø75 (3")		5/16" - 24	Yes	Vinyl	11	23
	00-5A3252		Hook					

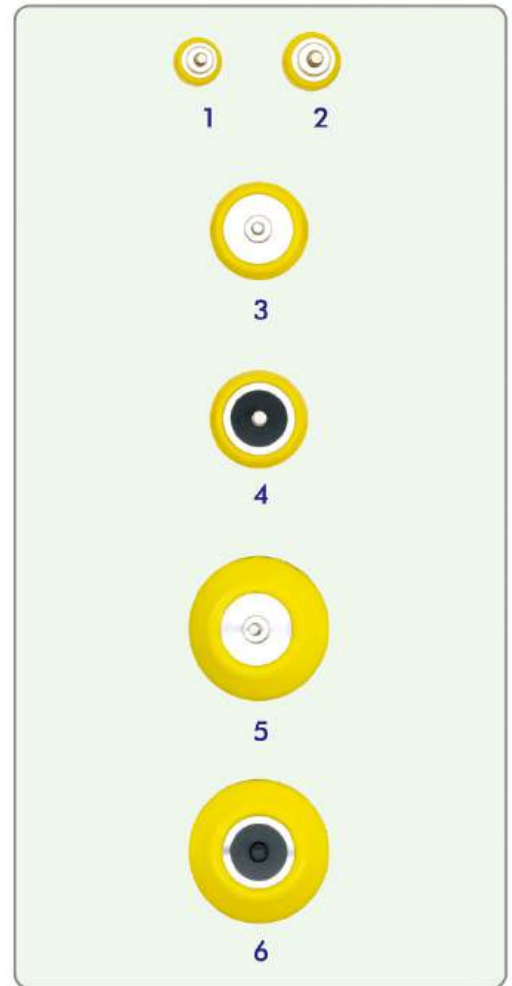

※ Actual specification and color are based on the real product.

## ▶ BACKING: Aluminum Plate - 3

No.	Part No.	Size (mm)	The Back of Pad	The Face of Pad	Application Model	Shape
1	A372W-88L	Ø125 (5")	Aluminum	Hook	CY-372D CY-372W	
2	A373D-88M	69 x 90 (2"-3/4 x 3"-1/2)	Aluminum	Vinyl	CY-373N CY-373D CY-373W	
	A373D-88L			Hook		
3	A374N-88M	73 x 140 (3"x 5-1/2")	Aluminum	Vinyl	CY-374N	
	A374N-88L			Hook		
4	A374D-88M	73 x 140 (3"x 5-1/2")	Aluminum	Vinyl	CY-374D	
	A374D-88L			Hook		
5	A374W-88L	73 x 140 (3"x 5-1/2")	Aluminum	Hook	CY-374W	
6	2563A-88M	70 x 77 (2-3/4" x 3")	Aluminum	Vinyl	CY-2563 CY-2565	
	2563A-88L			Hook		

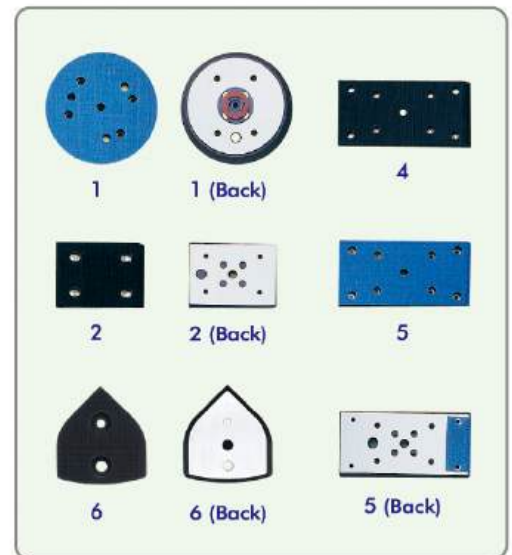


※ Actual specification and color are based on the real product.

## ▶ BACKING: Nylon 5/16" - 24 Thread (16mm)

No.	Part No.	Size (mm)	Thread Size	The Back of Pad	The Face of Pad	Thickness (mm)	Shape	Weight (g)
1	00-55101	Ø125(5")	5/16" - 24	NYLON	Vinyl	16	○	95g±5g
	Hook				16			
2	00-55151	Ø125(5")	5/16" - 24	NYLON	Vinyl	16	⊙	95g±5g
	Hook				16			
3	00-55161	Ø125(5")	5/16" - 24	NYLON	Vinyl	16	⊙	95g±5g
	Hook				16			
4	00-56101	Ø150(6")	5/16" - 24	NYLON	Vinyl	16	○	120g±5g
	Hook				16			
5	00-56161	Ø150(6")	5/16" - 24	NYLON	Vinyl	16	⊙	120g±5g
	Hook				16			

※Actual specification and color are based on the real product.

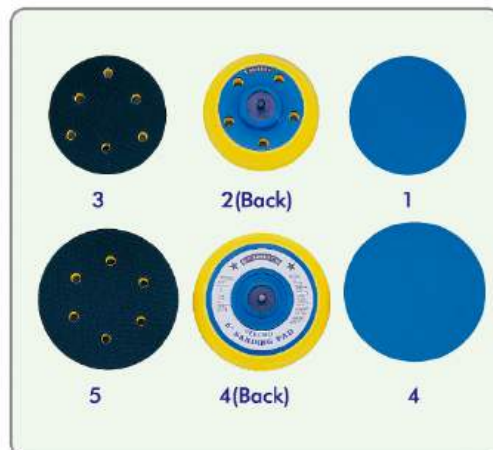

## ▶ BACKING: Nylon 5/16" - 24 Thread (12mm)

No.	Part No.	Size (mm)	Thread Size	The Back of Pad	The Face of Pad	Thickness (mm)	Shape	Weight (g)
1	00-55201	Ø125(5")	5/16" - 24	NYLON	Vinyl	12	○	100g±5g
	Hook				12			
2	00-55251	Ø125(5")	5/16" - 24	NYLON	Vinyl	12	⊙	100g±5g
	Hook				12			
3	00-55261	Ø125(5")	5/16" - 24	NYLON	Vinyl	12	⊙	100g±5g
	Hook				12			
4	00-56201	Ø150(6")	5/16" - 24	NYLON	Vinyl	12	○	110g±5g
	Hook				12			
5	00-56261	Ø150(6")	5/16" - 24	NYLON	Vinyl	12	⊙	110g±5g
	Hook				12			



**COMBEST** PNEUMATIC TOOLS....Utility , Trustworthiness and Satisfied.

## ▶ BACKING: Stainless Steel


No.	Part No.	Size (mm)	The Back of Pad	The Face of Pad	Application Model
1	2560A-38	22 x 50	Stainless Steel	Hook	CY-2560 CY-2561
2	2560A-39	17 x 65	Stainless Steel	Hook	CY-2560 CY-2561
3	2560A-39-1	17 x 65	Stainless Steel	Rubber	CY-2560 CY-2561
4	2560A-40	17 x 65	Stainless Steel	Stainless	CY-2560 CY-2561



※ Actual specification and color are based on the real product.

## ▶ BACKING: Nylon

No.	Part No.	Size (mm)	Shape
1	2562A-80	47 x 29	
2	2562A-81	98 x 40	
3	2562A-82	72 x 70	
4	2562A-84	98 x 29	
5	2562A-85	36 x 23	
6	2562A-86	48 x 24	
7	2562A-87	50 x 41	
8	2562A-83	46 x 27	

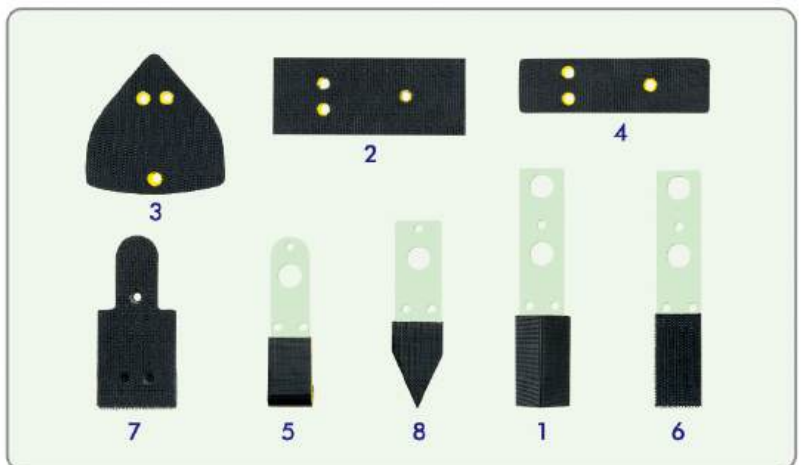

※ All of the pad are velcro type.

## ▶ Fixing Tools

**J001** Withdrawing Implement

**J002** Cylinder Nut Wrench

Application Model:  
CY-305, CY-306

**J003** Cylinder Nut Wrench

Application Model:  
CY-207, CY-2070, CY-2075, CY-2076, CY-2077, CY-2078, CY-2079, CY-2080, CY-2090, CY-2100, CY-309, CY-310, CY-323, CY-324, CY-327, CY-328, CY-3330

**J004** Bearing Separator



## Dust Bag & Adhesive-off Wheel

**101D-33** Dust Bag



**6700-31** Adhesive-off Wheel



Trusted Trademark



## Dust Hose Set

**A3330D-13A** Use for inner Thread




Size : 1" x 1.7M  
Application Model:  
CY-207D, CY-2070D, CY-2075D, CY-2076D, CY-2077D, CY-2078D, CY-2079D, CY-2080D, CY-2090D, CY-2100D, CY-305D, CY-306D, CY-307D, CY-308D, CY-309D, CY-3091D, CY-310D, CY-3101D, CY-325D, CY-326D, CY-327D, CY-328D, CY-3330D

**A306D-23** Use for inner Thread



Size : 1" x 1.8M  
Application Model:  
CY-207D, CY-2070D, CY-2075D, CY-2076D, CY-2077D, CY-2078D, CY-2079D, CY-2080D, CY-2090D, CY-2100D, CY-305D, CY-306D, CY-307D, CY-308D, CY-309D, CY-3091D, CY-310D, CY-3101D, CY-325D, CY-326D, CY-327D, CY-328D, CY-3330D

**A301D-23**



Size : 3/4" x 1.3M  
Application Model:  
CY-301D, CY-302D, CY-303D, CY-304D, CY-3031D, CY-3032D, CY-311D, CY-312D, CY-313D, CY-323D, CY-324D

**A101D-34**



Size : 1" x 1.8M  
Application Model:  
CY-101D, CY-207D, CY-2070D, CY-2075D, CY-2076D, CY-2077D, CY-2078D, CY-2079D, CY-2080D, CY-2090D, CY-2100D, CY-305D, CY-306D, CY-307D, CY-308D, CY-309D, CY-3091D, CY-310D, CY-3101D, CY-325D, CY-326D, CY-327D, CY-328D, CY-3330D

**A203D-15**



Size : 1" x 1.8M  
Application Model: CY-203D, CY-204D, CY-205D, CY-206D

**A373D-64**



Size: 3/4" x 1.3M  
Application Model: CY-372D, CY-373D, CY-374D

NEW PRODUCTS


AIR SANDERS

AIR TOOLS

VACUUM CLEANER

ACCESSORIES

## AIR SYSTEM INSTRUCTION

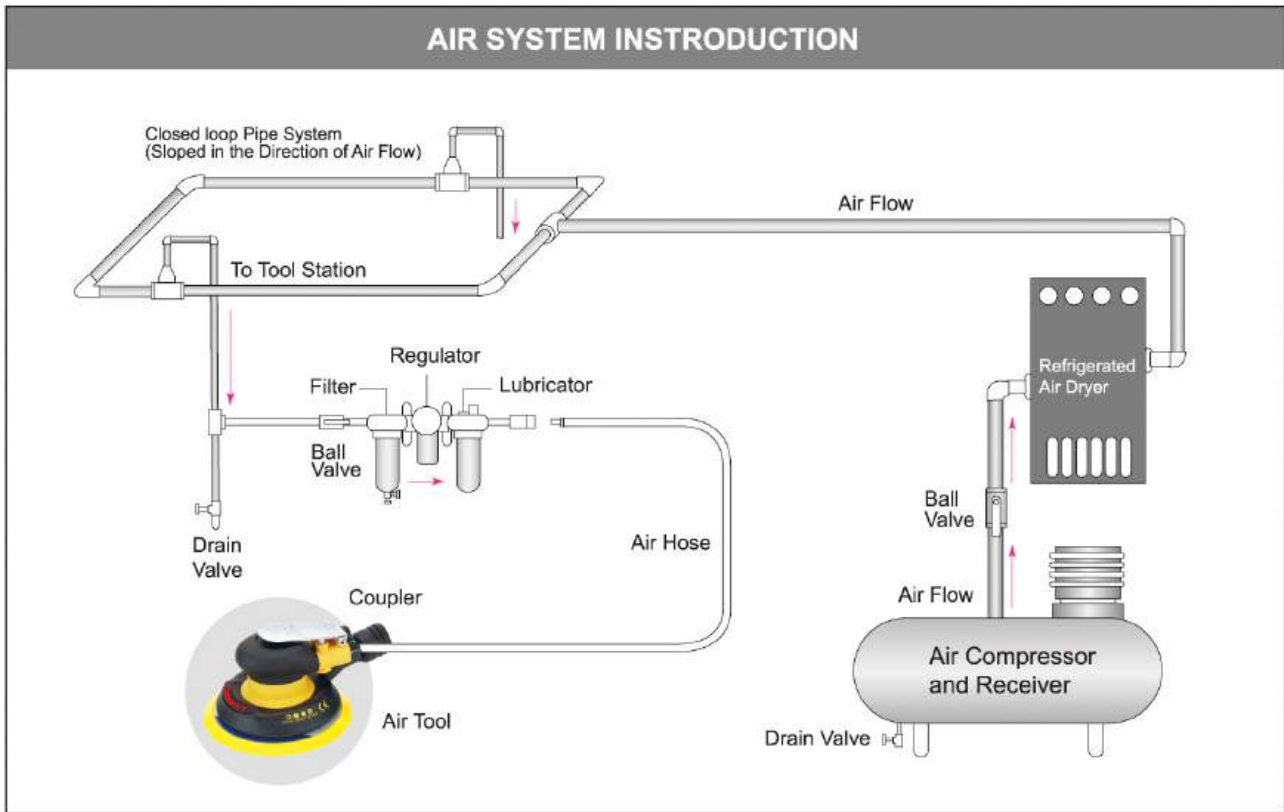

## PAD ACTION

### A. Orbital sanders type

#### GEAR ACTION



5 mm (3/16") Diameter Orbit

#### DUAL ACTION



10 mm (3/8") Diameter Orbit




5 mm (3/16") Diameter Orbit




2.5 mm (3/32") Diameter Orbit

### B. Jitterbug sanders type



Orbital Action



Reciprocating Action





# INDUSTRIAL & PROFESSIONAL PNEUMATIC TOOLS MANUFACTURER



**ORBITAL SANDER for ROBOT**



 **COMBEST**<sup>®</sup>  
KYMYO INDUSTRIAL CORP.  
[Http://www.combest.com.tw](http://www.combest.com.tw)  
©KYMYO, INC. 2023

Distributed by



※ The specification of the products may be revised without notification.  
※ Delivery according to the real products.